

NEC MultiSync® P553 DST (Single Touch)

Order Code: 60003744

NEC LCD 55" Large Format Display

The MultiSync® P553 DST follows the tradition of NEC's professional Large Format Display line. Certified for long periods of operation, the screen is equipped with a rich and unparalleled feature set, completed by an abundance of interfaces no other product on the market can match. The DST version of P Series is the perfect touch solution when a reliable and robust touch application is called for. In combination with NEC Slot-In PCs it is a clean looking and almost cable free solution.

An ideal solution for interactive applications requiring single touch technology, such as product promotions, way finding and any kind of self service.



DELIVERING GENUINE BENEFITS

DST - Dispersive Signal Technology - increases touch accuracy by accommodating objects resting on the screen, enhances the user's ease of operation through stylus independence and requires no recalibration in either a vertical (portrait and landscape) or horizontal position (tabletop).

3M DST Technology - very robust and does not require special input device or clean surfaces thanks to technology which relies on "bending waves" for locating the point of contact with the surface.

Public Displays DST Solutions - work in combination with NEC Slot-in PC without any external PC. It can be extended with additional interfaces and playback devices through the option slot which avoid additional cables and mounting brackets.

Future Ready with OPS Cable Free Expansion - Upgrade the power of your display at any time without the need for external cables or devices.


DICOM support- for medical applications.

Free Download of Multi-Display Management Software - with NaViSet Administrator 2 you can manage all your connected display devices from a centralized location.



OUTSTANDING PERFORMANCE

- **Reduce Installation and Operating Costs.** The combination of LED backlights, Intelligent Wireless Data (NFC), programmable Ambient Light Sensor and (optional) OPS Slot-in PCs delivers the lowest installation and operating cost of any large format display on the market.
- **Intelligent Wireless Data (based on NFC).** The built-in near field communication (NFC) chip allows data to be read and written with a mobile phone or tablet PC. Using the NEC Android app the user can pre-configure the display e.g. LAN settings, language etc. by holding an NFC capable device close to the display. All data will be transferred to the screen without the display needing power. This reduces set up and installation time and cost.
- **Human Sensor.** Save on power and reduce operating cost when the display operates at a very low brightness level and only switches to a higher brightness when a person is nearby. This optional feature can also be used for creative signage to e.g. switch inputs automatically to change from entertainment to information when a person approaches the screen.
- **Interface Extension.** This slot offers unique flexibility for additional connections with the choice of adding a single digital or two analogue boards.

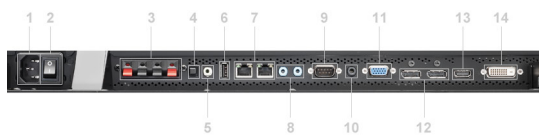

1. Power
2. Main Switch
3. Speaker connectors
4. Internal / External speaker switch
5. Audio out
6. USB port for service (firmware upgrades)
7. LAN daisy chain with SNMP (LAN switch and LAN / RS232 / remote loop through)
8. 2x Audio in
9. RS232 in
10. Remote in for external human / ambient sensor
11. VGA + Component input
12. DP 1.2 loop through
13. HDMI 1.4a
14. DVI-D

SPECIAL CHARACTERISTICS

Auto ID assignment, Auto tiling function, Automatic Alarm E-Mails, HTTP Server, Image flip, NaViSet Administrator 2, Point Zoom Function, Programmable 10-bit LUT with 3 memory banks, Sticky Note Function in OSD, User readable log function



Energy Efficiency Human Sensor; Ambient light sensor; Carbon savings meter; ECOMode

Ecological Materials Optional feet; Manuals on CD

Technical Specification NEC MultiSync® P553 DST (Single Touch)

DISPLAY	
Panel Technology	S-PVA with edge LED backlights
Active Screen Area (W x H) [mm]	1,209.6 x 680.4
Screen Size [inch/cm]	55 / 138.8
Brightness (shipping) [cd/m²]	500, (630 max)
Contrast Ratio (typ.)	4000:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8 (grey-to-grey)
SYNCHRONISATION RATE	
Horizontal Frequency [KHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	50 - 85
RESOLUTION	
Native Resolution	1920 x 1080 at 60 Hz
Supported on DisplayPort and HDMI	1024 x 768; 1080i; 1080p; 1280 x 1024; 1280 x 768; 1360 x 768; 1600 x 1200; 1920 x 1080; 3840 x 2160 (24/30 Hz); 480p (60 Hz); 576p (50 Hz); 640 x 480; 720p (50/60 Hz); 800 x 600
Supported on HDMI only	1360 x 768; 3840 x 2160 (25 Hz); 4096 x 2160 (24 Hz); 480i (60 Hz); 576i (50 Hz)
CONNECTIVITY	
Input Video Analogue	1 x D-sub 15 pin
Input Video Digital	1 x DVI-D (with HDCP); 1 x HDMI (with HDCP); 1 x DisplayPort (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	DisplayPort; 1 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Output Video Digital	1 x DisplayPort; 1 x HDMI; 1 x DVI-D; 1 x Interface Extension Slot; 1 x OPS; 1 x through DisplayPort out
Output Audio Analogue	3,5mm jack
Output Control	LAN 100Mbit
Remote Control	RS-232C (9-pin D-sub) Input; LAN with SNMP; Remote Control IR (internal/external (optional) sensor)
OPS OPTION SLOT	
Slot Technology	Open pluggable specification (NEC / Intel OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4
SENSORS	
Ambient Light Sensor	Integrated, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required
ELECTRICAL	
Power Consumption on Mode [W]	150 shipping; 317 (max.)
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS
ENVIRONMENTAL CONDITIONS	
Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
MECHANICAL	
Dimensions (W x H x D) [mm]	Without stand: 1,250.2 x 721 x 71.5
Weight [kg]	Without stand: 34.8
Bezel Width [mm]	18.5
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
AVAILABLE OPTIONS	
Accessories	Feet (ST-5220); Speaker (SP-TF1, SP-RM1); Wall mount (PDW S 32-55 L/P; PDW T L L/P)
Interface Extension	SB3-AB1 analogue: Audio; Component; Composite; S-Video SB3-AB2 analogue: Audio; RGBHV SB3-DB1 digital: 1 x DisplayPort out; 1 x HDMI; 2 x DisplayPort
OPS	HD-SDI 1.5G, 3G; HDBaseT receiver; Intel® Atom, Celeron and Core CPUs; WiDi receiver
ADDITIONAL FEATURES	
Safety and Ergonomics	C-tick; CE; FCC Class B; PSB; TÜV GS; UL/C-UL or CSA; VCCI; RoHS
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	Display; DVI-D cable; Power Cable; Remote Control; CD-ROM (User Guides/Manuals)
Warranty	3 years warranty incl. backlight
TOUCH	
Protection Glass	Chemically-strengthened glass substrate
Input Method	Finger; Stylus; Gloves
Light Transmission [%]	92 (+/-2%)
Reflection Rate [%]	Anti-glare tech (low reflection)
Driver	MicroTouch MT7 for MicroTouch DST driver for Microsoft®; Windows 7; Windows® 2000/XP/VISTA; HID-compliant
Communication Protocol	USB-HID