

5<sup>TH</sup> Generation

Orchestrating a brighter world

**NEC**

High-performance, LED-backlit LCD  
displays ideal for corporate environments

# NEC MultiSync® EA Series

Business Desktops 27" | 30"  
UHD Desktops 27"



# Reimagine your desktop computing experience.



With its 5<sup>th</sup> generation MultiSync EA Series, NEC has developed monitor solutions that push the boundaries of what you've come to know as business-class screen performance. The EA Series deliver a host of enhanced features, advanced technologies, future-proof connectivity and environmentally friendly benefits. All models utilize IPS LCD panels, which boast the best possible color accuracy and minimal viewing angle shift.

EA Series Desktops	
27"	EA275UHD
27"	EA275WMI
30"	EA305WMI



## Highlights

- LED backlight technology provides for industry-leading low power consumption and less hazardous materials
- Touch-sensitive OSD® controls are integrated into the bezel, making display adjustments easier than ever
- Integrated USB 3.0 hub easily connects you to your peripherals
- ENERGY STAR® compliance reduces electrical costs and lowers total cost of ownership

## MultiSync EA Series Features

### Multiple Monitor Technologies

The ground breaking ControlSync™ technology allows users to control up to six select MultiSync EA Series units in a multi-monitor configuration. Upon establishing one unit as the master, you will be able to simultaneously control many performance attributes of the multi-monitor setup through the master monitor. ControlSync enables multi-monitor setups of up to six monitors and controls up to 26 settings.

### Comprehensive Input Panel

DisplayPort, HDMI, DVI-D and 15-pin VGA \*select models, as well as USB 3.0 hubs connect you to the latest peripherals and future-proofs your investment.



### Adjustable for Every Workspace

Four-way ergonomic stand boasts pivot, tilt, swivel and height adjustment up to 130mm to maximize your viewing comfort. In addition, Space-saving multimedia speakers are hidden to maintain the monitor's aesthetic appeal (headphone jack also included).



### Smart Sensing Technologies

Smart sensing technology includes ambient light and human sensors, which considerably reduce power consumption by automatically detecting your work conditions and adjusting to the proper display brightness or entering Power Saving Mode.



### Power-saving Features


Include ECO Mode™, a carbon footprint meter and an ambient light sensor, which automatically adjusts the brightness to the optimal setting depending on ambient lighting, screen content or both, conserving power up to 87% compared to typical energy consumption. In addition, the human sensor detects user activity in front of the monitor and reduces display power up to 95% with inactivity.



### IT-Friendly Features

Customize Setting allows both users and IT administrators to set and restore preferred settings with just one touch, contributing to a free-seating business environment.

The optional NaViSet™ Administrator 2.0 software offers an intuitive graphical interface, allowing for easy adjustment of display settings via mouse and keyboard. NaViSet Administrator provides all the advanced control to remotely located IT professionals.

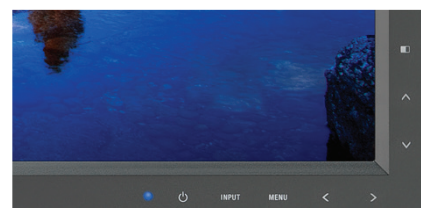

MODEL		EA275Wmi	EA305Wmi	EA275UHD	
<b>Display</b>	Panel Technology	AH-IPS	AH-IPS	AH-IPS	
	Backlight Type	W-LED	GB-R LED	LED	
	Viewable Image Size	27"	29.8"	27"	
	Aspect Ratio	16:9	16:10	16:9	
	Native Resolution	2560 x 1440	2560 x 1600	3840 x 2160	
	Pixel Pitch	0.23mm	0.25mm	0.16mm	
	Pixels Per Inch (at native resolution)	109 @ native resolution	101 @ native resolution	163 @ native resolution	
	Brightness (typical)	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	
	Contrast Ratio (typical)	1000:1			
	Viewing Angle (typical)	178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10			
	Response Time (typical)	6ms			
	Displayable Colors	16.8 million			
	Synchronization Range	31.5 KHz - 83.0 KHz / 31.5 KHz - 91.0 KHz			
	Horizontal (Analog/Digital)	31.5-83 kHz	31.5-98.7kHz	31.5-135 kHz	
	Vertical	56-75 Hz	56.0 Hz - 75.0 Hz	30-75 Hz	
	Input Signal	Video	Analog RGB 0.7 Vp-p/75 Ohms		
Sync		Composite sync: TTL Level (Positive/Neg tive) Composite sync on green: (0.3Vp-p negative 0.7Vp-p positive)			
Input Connectors		DVI-I, DisplayPort 1.2, HDMI 2.0		DVI-D, HDMI, DisplayPort	
Output Connectors		DisplayPort 1.2 out		N/A	
<b>POWER CONSUMPTION</b>	On (typical)	57W	83W	71W	
	Power Savings Mode (typical)	0.44W		0.5W	
<b>PHYSICAL SPECIFICATIONS</b>	Dimensions (WxHxD)	Net Weight (with stand)	25.2 x 16.5 - 21.6 x 9.1 in. / 639.2 x 417.9 - 537.9 x 230 mm	27.0 x 18.6 - 23.7 x 9.1 in. / 686.9 x 472.8 - 602.8 x 230.0 mm	25.2 x 16.5 - 21.6 x 9.1 in. / 639.2 x 417.9 - 537.9 x 230 mm
		Net Weight (without stand)	25.2 x 14.9 x 2.6 in. / 639.3 x 377.8 x 72 mm	27.0 x 17.6 x 3.0 in. / 800.0 x 613.0 x 280.0 mm	25.2 x 14.9 x 2.6 in. / 639.2 x 377.8 x 66.5 mm
	Net Weight (with stand)	19.2 lbs. / 8.7 kg	24.0 lbs. / 10.9 kg	20.1 lbs. / 9.1 kg	
	Net Weight (without stand)	12.8 lbs. / 5.8 kg	17.2 lbs. / 7.8 kg	13.7 lbs. / 6.2 kg	
	VESA Hole Configuration	100 x 100 mm			
<b>ENVIRONMENTAL CONDITIONS</b>	Operating Temperature	41-95°F / 5-35°C			
	Operating Humidity	20-80%			
	Operating Altitude	16,404 ft. / 5000m	6562 ft. / 2000m		
	Storage Temperature	14-140°F / -10-60°C			
	Storage Humidity	10-85%			
	Storage Altitude	40,000 ft. / 12,192m			
<b>ENVIRONMENTAL COMPLIANCE</b>	ENERGY STAR	6.0			
	TCO	Certified 6.0 / Edge Certified 1.2		Edge Certified 1.2	
	RoHS	Yes			
<b>LIMITED WARRANTY</b>		3 years parts and labor, including backlight. Warranty restrictions apply			
<b>ADDITIONAL FEATURES</b>		Tilt; Swivel; Pivot; Height-adjustable stand; ControlSync; Customize Setting; Integrated speakers; 4-port USB hub; LED backlight; Auto brightness with ambient light sensor; Human sensor; ECO Mode; Carbon footprint meter; Resettable cost meter; Thin frame; Carrying handle; Rapid Response; Ambix; XtraView; Hot Key; Touch OSD controls; OSD Lock Out; Cable management; Dynamic Visual Mode (Standard, Text, Movie, Gaming, Photo, Dynamic); Nav/Set Administrator 2; VESA mount; HDCP; DDC/CI; No Touch Auto Adjust; Plug and Play (VESA DDC2B); VESA DPMS power management; AccuColor color control; Digital smoothing; Digital controls; ISO 9241-307 Class I; DICOM SIM for IPS models			
<b>SHIPS WITH</b>		Setup sheet; User manual; Power cord; DisplayPort cable; DVI-D cable; USB cable; Audio cable; ControlSync cable			



MultiSync is a registered trademarks and ECO Mode and ControlSync are Trademarks of NEC Display Solutions. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.

©2015 NEC Display Solutions of America, Inc. and the NEC logo are registered trademarks of NEC.

**NEC Display Solutions**

500 Park Boulevard, Suite 1100  
Itasca, IL 60143  
866-NEC-MORE