


Epson AcuLaser CX29NF Series

DATASHEET

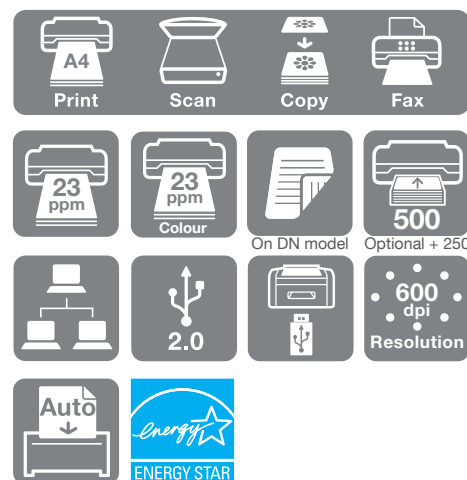

KEY FEATURES

- Fast print speeds of 23ppm
- Print resolution of 600x600dpi
- High-quality printing and copying with excellent colour
- 256MB standard memory; optional 512MB of additional memory

Developed for demanding micro-businesses and small businesses, the Epson AcuLaser CX29NF Series is engineered to meet every business requirement with print, copy, scan and fax functions.

All models in this multi-function series can easily handle large jobs and, with print and copy speeds of 23 pages per minute for both mono and colour, it is one of the fastest in its class. Professional-standard print resolution of 600x600dpi produces high-quality images, combined with vibrant and realistic colours thanks to Epson's AcuBrite toners.

Designed to meet the needs of complex IT environments, all models in the series come network-ready with numerous interfaces and emulations. Gigabit Ethernet as standard, IPv6, Adobe® PostScript 3® and PCL 5c/6 emulations provide greater flexibility and easy integration.

An automatic document feeder speeds up scanning and copying, while an additional 250-sheet paper tray can double paper capacity and increase productivity. And for greater efficiency, the CX29NF model comes with optional double-sided printing, cutting paper usage and costs by up to 50 percent. This duplex feature comes as standard on the CX29DNF.

The 256MB standard memory is among the highest in its class and you can enhance performance even further with an optional 512MB of additional memory.

As one of the most competitively-priced in its class, the CX29NF Series offers great value for money. ENERGY STAR-qualified reduced power consumption helps businesses further reduce total cost of ownership and environmental impact.



An additional 250-sheet paper tray increases paper capacity to 500 sheets.

PRODUCT SPECIFICATIONS

	AL-CX29NF	AL-CX29DNF
TECHNOLOGY Print resolution	Laser 600 x 600dpi	
PRINT Print speed mono/colour First page out mono/colour Maximum monthly volume	Up to 23ppm 15.5 seconds or less Up to 40,000 pages	
CONNECTIVITY Printer interface USB host Network printing protocols Network management protocols	Ethernet (10Base-T/100Base-TX/1000Base-TX) USB 2.0 compliant , Fax RJ11 USB 2.0 compliant: direct print (PDF 1.4, JPEG) from USB storage only TCP/IP: IPP, LPD/LPR , FTP, WSD, Port9100 TCP/IPv4, TCP/IPv6, IP/Sec, DHCP, SNMP v1/v2c/v3, BootP, RARP, HTTP, HTTPS, SMTP v1, SNMP, DDNS, AutoIP, Ping , WINS, Bonjour (mDNS), LDAP	
PAPER HANDLING Standard paper input Paper size Duplex Paper weight Paper output Maximum paper input Optional paper handling Automatic document feeder	250 sheets + 1-sheet from the single sheet inserter A4, B5, A5, LT, EXE, US Folio, LGL, GLT, Com-10, Monarch, DL, C5, user defined: 76.2 to 220 mm width and 127 to 355.6 mm length, Labels, Envelopes Optional Standard 60-216g/m ² 150 sheets (face-down) Up to 501 sheets 1 x 250-sheet paper tray Up to 35 sheets	
SCAN & COPY Scan speed mono/colour Optical resolution Scan area/document size Scan to functions Compatibility Copy resolution Copy speed mono/colour Zoom	Up to 16spm/up to 8spm 1200x1200dpi Flatbed: up to 215.9 x 297mm, ADF: up to 215.9 x 355.6mm Scan to Email, Scan to SMB, Scan to FTP, Scan to USB memory (PDF, JPEG, TIFF) Twain, WIA Up to 600 x 600dpi 1-to-N copy: up to 23cpm, 1-to-1 copy (ADF): up to 16cpm/8cpm 25% - 400%	
FAX Fax protocol transmission speed Memory Dialing functions Fax speed dial Fax functions PC fax functions	Up to 33.6 Kbps, ECM, Super G3 compliant 4MB 6 group dial 200 numbers Address book, one-touch dial (8 keys), auto redial, reduce/split, auto receive mode Send fax from PC (local and network)	
POWER REQUIREMENTS Power consumption Voltage Current Frequency range	Max: 1100W, printing: 410W/h, ready: 60W/h, sleep: 35W, power off: 0W AC 220V-240V ±10% 5A or less 50Hz/60Hz ± 3Hz	
DIMENSIONS (W x D x H)	430 x 544.2 x 584.4mm	
WEIGHT (with consumables)	28.6kg	29.8kg
STANDARDS EMC standard Safety standards	IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8 IEC61000-4-11, EN55022, EN61000-3-2, EN61000-3-3 IEC60950-1, EN60950-1, IEC60825-1-1, IEC60825-1-2, EN60825-1-1, EN60825-1-2	
GENERAL Sound power Sound pressure Operating temperature Operating humidity Windows support Mac support Drivers	Printing: 6.79B, ready: 4.30B Printing: 53dB(A), ready: 28dB(A) Operation: 10-32°C, storage: 10-35°C Operation: 10-85%RH, storage: 15-80%RH Windows XP (32bit/64bit), Vista (32bit/64bit), 7 (32bit/64bit), Server 2003 (32bit/64bit) Server 2008 (32bit/64bit), Server 2008 R2 (64bit) Mac OS X 10.4.11 and later Printer driver (PCL6/Sc, PS3), Scanner driver, Fax driver	
OTHER FEATURES Environmental measures Processor Memory Printer control language emulations Resident typefaces LCD	ENERGY STAR-qualified 533MHz Standard: 256MB, max: 768MB Adobe PostScript 3, PCL 5c/6 Emulation Scalable: 81 PCL, 136 PostScript 4 lines	
WARRANTY* Standard Optional	1-year on site 3-year on site (ECPGRP50)	

* Warranty offers are not available for all countries. Please contact your local Epson representative.

Epson AcuLaser CX29NF Series

PRODUCT MODEL ORDER CODES

- **AcuLaser CX29NF**
- **AcuLaser CX29DNF**

WHAT'S IN THE BOX

- Printer
- Power cable
- Software CD
- Instruction manual
- Warranty sheet

SUPPLIES

- **Black Toner Cartridge**
(3.000 pages¹) C13S050630
- **Double Black Toner Cartridge**
(6.000 pages¹) C13S050631
- **Yellow Toner Cartridge**
(2.500 pages¹) C13S050627
- **Magenta Toner Cartridge**
(2.500 pages¹) C13S050628
- **Cyan Toner Cartridge**
(2.500 pages¹) C13S050629
- **Drum Cartridge (CMYK)**
(36.000 pages²) C13S051211
- **Initial Toner Cartridges CMYK**
(1.000 Pages¹)

¹ ISO/IEC19798 and ISO/IEC24712 yield test reports

² Life of drum cartridge is defined based on continuous printing. It varies depending on print conditions.

OPTIONAL ACCESSORIES

- 250-sheet paper tray C12C802681
- Duplex unit C12C802661
- 512MB memory C12C822121

TONER CARTRIDGE COLLECTION PROGRAM

This free service helps us to collect and recycle used Epson toner cartridges in a safe and environmentally-friendly way. There are three easy ways to dispose of your empty cartridges and take an active role in reducing waste:

- Put them in a toner cartridge collection box which will be picked up once full
- Return them free of charge by post
- Drop them off at an Epson Express Centre
Please visit www.epson.com/recycle for more details about the program



Better Products for a Better Future™
<http://eco.epson.com>

For further information please contact your local Epson office or visit www.epson-europe.com

Austria 0810/20 01 13 (0,07 €/Min.) **Belgium** 070/350120 (0.1735 €/min.) **Czech** 800/142 052 **Denmark** 44 50 85 85 **Finland** 0201 552 091
France 09 74 75 04 04 (Cost of local call, operator charges may apply) **Germany** 01805/23 41 10 (0,14 €/Min. aus dem dt. Festnetz, Mobilfunkpreise abweichend. Ab 1.3.2010 Mobilfunkpreis max. 0,42 €/Min.) **Greece** 210-8099499 **Hungary** 06800 147 83 **Ireland** 01 436 7742 **Italy** 02-660321 10 (0,12 €/min.) **Luxembourg** 900/43010 (0,24 €/min.) **Middle East** +9714 8818934 **Netherlands** 0900-5050808 (0.05 €/oproep + 0.15 €/min.)
Norway +47 67 11 37 00 **Poland** 0-800 4911299 (0,16 zł/min.) **Portugal** 707 222 111 **Russia** (095) 777-03-55 **Slovakia** 0850 111 429
South Africa (+2711) 465-9621 **Spain** 93 582 15 00 **Sweden** 0771-400135 (Mobilsamtal – 0,99 kr/min, Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min)
Switzerland 0848 448820 (4-8 cent./min.) **Turkey** (0212) 3360303 **United Kingdom** 0871 222 6702

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners.
Product information is subject to change without prior notice.

EPSON®