

27" Full HD Multimedia LED Monitor

2ms Ultra-fast Response Time for Gaming and Entertainment

VX2757-mhd



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2700
(Sold Separately)

Fully equipped to handle state-of-the-art AAA games and Hollywood blockbuster films, the ViewSonic® VX2757-mhd multimedia monitor delivers it all for entertainment enthusiasts. This 27" monitor features an ultra-fast 2ms response time and AMD FreeSync™ technology for smooth, tear-free visuals during intense fast-paced action scenes. On top of that, a Game Mode hot key and black stabilization functions deliver heightened visibility and detail so you can see your opponents' every move. And for times when you want to kick back and enjoy an epic cinematic adventure, this monitor's Full HD resolution and 80M:1 MEGA Dynamic Contrast Ratio deliver a movie theater viewing experience.

Key Features:

Ultra-fast response time

AMD FreeSync™ technology*

Low input lag for seamless gaming experience

Black stabilization for ultimate visibility

Game Mode hotkey and pre-calibrated,
user-customized settings


Designed for:

Gaming

Entertainment

27" Full HD Multimedia LED Monitor

VX2757-mhd

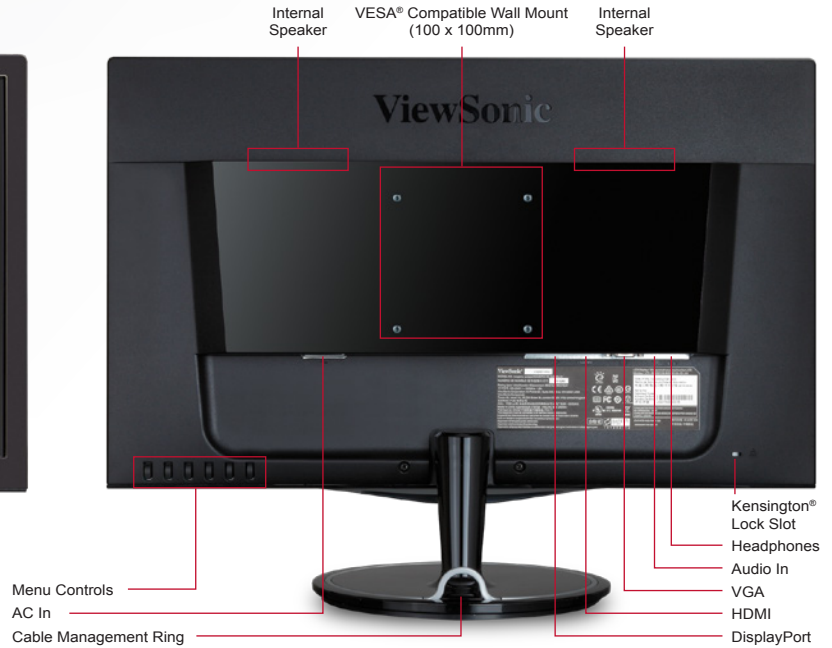

Specifications

LCD PANEL	Type	TN Type, a-si TFT Active Matrix LCD
	Display Area	23.5" horizontal x 13.2" vertical; 27.0" diagonal
	Optimum Resolution	1920x1080
	Brightness	300 cd/m ² (typ.)
	Contrast Ratio	1200:1 (typ.)
	Dynamic Contrast Ratio	80M:1
	Viewing Angles	170° horizontal, 160° vertical
	Colors	16.7M (6bit + A-FRC)
	Response Time	1.5ms (GTG)
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital	DisplayPort, HDMI
	Analog	VGA
	Frequency	Fh: 24~84kHz, Fv: 47~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green, TMDs, PCI-E
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
CONNECTOR	Video In	DisplayPort, HDMI, VGA
	Audio In	3.5mm mini jack
	Headphones	3.5mm mini jack
	Power	3-pin plug (CEE22)
CONTROLS	Front Panel Buttons	1, 2, Down, Up, GameMode, Power
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 22°
POWER	Voltage	AC 100–240V (universal), 50 / 60Hz
	Consumption	28W (typ.) / 31W (max.)
	Optimize	21W (typ.)
	Conserve	15W (typ.)
OPERATING CONDITIONS	Temperature	32–104° F (0–40° C)
	Humidity	20–90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	25.2 x 19.3 x 9.8 in. / 639.7 x 489.1 x 249.7 mm
	Physical without Stand	25.2 x 15.8 x 2.0 in. / 639.7 x 401.5 x 49.9 mm
	Packaging	27.9 x 22.4 x 6.2 in. / 708 x 569 x 158 mm
WEIGHT	Net with Stand	10.8 lb. / 4.9 kg
	Net without Stand	9.5 lb. / 4.3 kg
	Gross	14.5 lb. / 6.6 kg
WALL MOUNT	VESA compatible	100 x 100 mm
REGULATIONS		CE EMC, CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, Windows 8 & 10, UL, ENERGY STAR 6.0, EPEAT Silver, Mexico-CoC, Mexico Energy, FCC-B, BSMI, PSB, RCM, MEPS, SASO, KC, E-standby, VCCI, PSE, CCC, CEL Level 1
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

HDMI to DVI cable 6FT	CB-00008948
Mini DisplayPort to DisplayPort cable 6FT	CB-00010958
DisplayPort to DisplayPort cable 30FT	CB-00010684
DisplayPort Male to VGA Female Adapter (Single Link).....	CB-00011486
DisplayPort to DisplayPort cable 6FT.....	CB-00010555
DisplayPort to DVI Adapter.....	LCD-CABLE-001
Desktop Display Wall Mount Kit	LCD-WMK-001

What's in the box?

VX2757-mhd monitor, Power cable, Audio cable, VGA cable, HDMI cable, Quick Start Guide, ViewSonic Wizard CD



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.