



Overview

HP MSL6000 Tape Libraries provide a secure, centralized backup in a single automated device, freeing valuable IT resources for more strategic work. These libraries are ideal for medium to large IT networks, with or without a storage area network (SAN), experiencing uncertain data growth. The MSL6000 Tape Libraries offer a choice of tape technology including HP LTO-4 Ultrium 1840 with embedded hardware encryption support, or Ultrium 960, tape drives. Backups are secure with AES 256-bit hardware encryption embedded on the HP LTO-4 Ultrium 1840 Tape Drives. Encryption key management support is available with HP Data Protector and other ISV backup applications. This portfolio of tape libraries offers a secure, scalable, and manageable centralized tape backup solution that can grow with ever-changing backup and recovery needs, while reducing IT staff involvement.

The MSL6000 Tape Libraries will scale to larger configurations by enabling a single library to grow and change with capacity and technology as needs require. Not only will the MSL6000 Tape Library scale within the family, but it can also be scaled with MSL5000 Tape Libraries using a pass-through mechanism, for up to 16 drives and 240 slots. LTO-4 Ultrium 1840 or Ultrium 960, tape drives are available as upgrades to currently installed MSL5000 and MSL6000 Tape Libraries. The MSL6000 Tape Libraries are easily managed through an intuitive GUI-control panel and integrated remote web management, allowing simple management capabilities from any remote or on-site location.

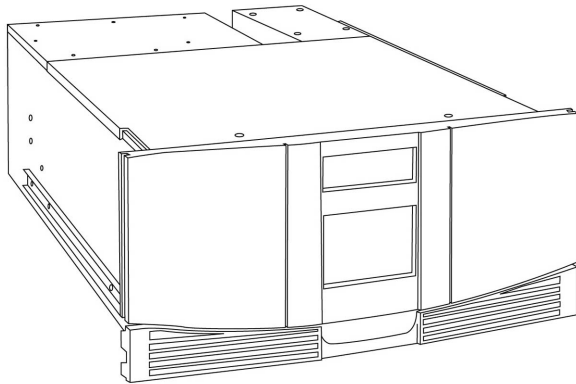

HP MSL6030 Tape Library

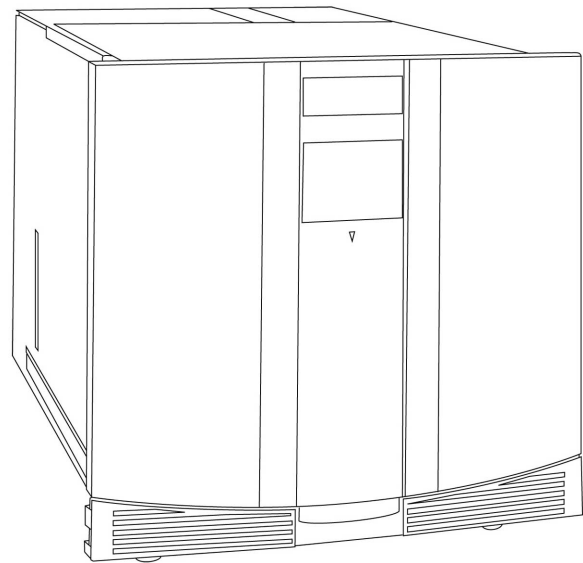

HP MSL6060 Tape Library

What's New

- HP MSL6000 Tape Libraries are now available with LTO-4 Ultrium 1840 hardware encrypting tape drives for secure high performance backups meeting consortium specifications for LTO-4

Overview

Key Features

- Scalable up to 16 drives and 240 slots
- Flexible in terms of choice for tape drive technology and library interface
- Investment protection for performance and capacity needs
- Manageable
- Secure with AES 256-bit embedded encryption support on the LTO-4 Ultrium 1840 tape drives.
- Reliable
- Extensive compatibility testing
- Agility in storage and movement of data

Customer Benefits

- Multi-unit stacking allows the library to grow with changing storage requirements for up to 16 drives and 240 slots using either MSL6000 or MSL5000 Tape Libraries.
- Available with a broad choice of tape technologies including Ultrium 1840 or Ultrium 960 ; and with either aSCSI LVD/SE or Fibre Channel interface.
- Backups are secure with embedded hardware encryption on the HP LTO-4 Ultrium 1840 Tape Drives. Receive the highest level of encryption capability ensuring data privacy and regulation compliance. Encryption key management support is available with HP Data Protector and other ISV backup applications
- Upgrade to a new drive technology by simply installing a drive upgrade kit into an existing library chassis.
- A controller-based architecture allows direct-attach configurations to easily move to a SAN environment via an interface card upgrade.
- User-friendly GUI control panel and web interface make library management easy from any remote or local location.
- Tape libraries provide consistent backup and automatically change tapes with a robotics rating of two million Mean Swaps Between Failures (MSBF).
- Works with industry-leading servers, operating systems and backup software. (<http://www.hp.com/go/ebs>)
- For dedicated import/export of data cartridges, each library includes one to two configurable mail slots, along with two to four removable magazines, dependent upon library configuration.

Family Comparison	MSL6030 Tape Library	MSL6060 Tape Library
Form Factor	5U	10U
Tape Drives Supported	LTO-4 Ultrium 1840 LTO-3 Ultrium 960	LTO-4 Ultrium 1840 LTO-3 Ultrium 960
Max Drives per Unit	2	4
Max Capacity per Unit (compressed 2:1)	48 TB (LTO-4) 24 TB (LTO-3)	96 TB (LTO-4) 48 TB (LTO03)
Max Number of Units Stacked	8	4
Max Data Transfer Rate per Unit (compressed, max drives)	1.7 TB/hr (LTO-4) 1.15 TB/hr (LTO-3)	3.45 TB/hr (LTO-4) 2.3 TB/hr (LTO-3)
Interface	Ultra320 LVD SCSI 4Gb Fibre Channel	Ultra320 LVD SCSI 4Gb Fibre Channel



Product Highlights

Multi-unit Scalability

The MSL6000 Tape Library has the capability for multi-unit scalability; up to four 10U libraries or eight 5U libraries can be scaled together into a single library. For the MSL6030, the first two modules are linked using the MSL Universal Pass-Through Mechanism base unit kit, which has a shuttle mechanism for tape movement between units. For the MSL6060, the first two modules are linked using the MSL Universal Pass-Through Mechanism base unit kit and a 10U extender kit. Additions of subsequent modules require one MSL 5U or one MSL 10U pass-through extender kit per library module. A MSL6000 Tape Library can also be scaled with a MSL5000 Tape Library for added flexibility and investment protection. The ISV application will determine mixed media and tape drive support per tape library configuration.

Manageability

The MSL6000 Tape Library includes web-based management to allow monitoring and managing of the library from across the room or across the globe. Many of the functions that are available on the front panel are included in the remote management interface. These include, but are not limited to: library and drive status, moving media, load/unload tape drives, access to diagnostics, library configuration, library statistics, inventory check, and security settings.

Proven Reliability

With a rating of 2,000,000 robot load/unload cycles, the MSL6000 Tape Library provides necessary high reliability for today's demanding environment. To improve reliability and longevity, all HP Ultrium products feature Data Rate Matching (DRM). This allows the tape drive to dynamically and continuously adjust the speed of the drive, to match the speed of the host or network. This increases performance, reduces mechanical wear on the tape drive and extends tape life.

Data Privacy

To greatly enhance data privacy, HP MSL6000 Tape Libraries are now available with LTO-4 Ultrium 1840 hardware encrypting tape drives for secure high performance backups meeting consortium specifications for LTO-4. HP Data Protector Software can enable the drive encryption and provide basic key management capabilities. Additional ISV supporting hardware encryption is available on the HP Enterprise Backup Solution website at <http://www.hp.com/go/ebs>. The encryption on LTO-4 media occurs with or without compression, and without speed or capacity penalties. You can read LTO-2 and LTO-3 tapes, and write LTO-3 tapes, but hardware encryption is not supported in these formats.

LTO4 uses the Advanced Encryption Standard (AES) with the longest and most secure keys -- 256 bits. AES-256 is implemented within Galois Counter Mode (GCM). This is a method of increasing AES security by efficiently adding Message Authentication Codes to ensure the integrity of the backup data stored on tape. The HP LTO-4 Ultrium 1840 Tape Drive is designed to be compliant with the emerging standard for tape drive security (IEEE 1619.1).



Product Highlights

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Customization must comply with all relevant product specifications and factory supported configurations.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, and HP 9000 servers as well as MSA, VA7xxx, EVA, and XP disk arrays, rackable tape libraries and configurable network switches.

Type of service support varies by platform and product family. For more information on Factory Express services for your specific server model or storage device please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Library and Tape Tools (L&TT)

The MSL6000 Tape Library configurations are supported on HP's industry-leading diagnostic tool - HP Library and Tape Tools (L&TT). L&TT is a single, convenient program that's a snap to install and simple to operate. L&TT's intuitive user interface eliminates the need for training and deploys in less than five minutes. This robust diagnostic tool is designed for both the experienced professional and the untrained administrator. It ensures product integrity through self-diagnostics and fast resolution to device concerns. Additional information on L&TT plus download information can be found at: <http://www.hp.com/support/tapetools>.

LTO Ultrium Technology

HP LTO (Linear Tape Open) Ultrium Tape Drives use best of breed technology. By taking the best features from other tape technologies and combining them into a single new technology, Ultrium tape drives are in a league of their own. Inclusion of innovative features such as Adaptive Tape Speed (ATS) ensure that Ultrium drives can meet the performance and reliability demands of a library environment. LTO technology is an open industry standard format; thus data written on HP Ultrium Tape Drives can be interchanged directly with Ultrium Tape Drives from other vendors.

Data Rate Matching

Data Rate Matching combines sophisticated buffer management with HP's exclusive variable Adaptive Tape Speed technology, to allow the tape drive to match its transfer rate to the host speed dynamically and continuously across the wide range of transfer rates. This feature ensures that the tape drive continues to stream data regardless of the environment, and brings two big advantages:

- It optimizes backup performance and maximizes overall efficiency allowing the drive to respond immediately to any speed changes from the host
- It minimizes rewinding and repositioning of the tape, significantly reducing physical wear and increasing reliability
- It minimizes the power requirements for the drive by reducing the number of repositions needed

LTO Ultrium Tape Drive

ATS data transfer rate range (native)

HP LTO-4 Ultrium 1840

40 to 120 MB/s

HP LTO-3 Ultrium 960

35 to 80 MB/s



Product Highlights

HP Ultrium WORM

Critical to the success of data retention policies in highly regulated environments is the ability to store and manage data in an unalterable state. Following stringent guidelines set forth by regulatory agencies such as the SEC and HIPPA, IT organizations must now integrate new solutions and policies that can verify the integrity of stored data for periods that can extend well beyond seven years.

The LTO-4 Ultrium 1840 and LTO-3 Ultrium 960 tape drives features the ability to archive and store data in a non-rewriteable format that meets the most stringent regulatory guidelines. Using a combination of integrated fail-safe features in the drive firmware, cartridge memory, and tape formatting, the tape drives can archive large amounts of data for periods of up to 30 years in a secure, untampered state. Since all LTO-4 Ultrium 1840 and LTO-3 Ultrium 960 tape drives include support for both rewritable and WORM media, IT organizations can now easily integrate a secure, long-term archiving solution into their current data protection strategy. As compared to other technologies that feature support for WORM storage, the tape drives offer the advantages of:

- A single drive to support all backup and archiving needs
- Two distinctive tape cartridges to easily distinguish and manage both rewriteable and WORM data cartridges
- A specially designed WORM data cartridge with multiple integrated fail-safe features to prevent accidental or intentional overwriting of data
- High-capacity, low-cost HP WORM media that can store 1.6TB (2:1 compression) of data on a single data cartridge
- Support from many backup and archiving software vendors, providing the most comprehensive and mainstream support in the industry
- The LTO open standard that offers greater choice and compatibility across all third-generation Ultrium products

NOTE: While all HP LTO-4 Ultrium 1840 and LTO-3 Ultrium 960 tape drives support LTO Ultrium WORM media, some third- and fourth-generation LTO Ultrium tape drives from other manufacturers may not include read and write support for LTO Ultrium WORM media. For non-HP third- and fourth-generation LTO Ultrium tape drives, please check the manufacturers' specifications to ensure this support is provided if you are using your WORM media. If WORM support is not provided, the drive will eject the WORM tape cartridge immediately upon insertion into to the tape drive.

HP Storage Media

HP recommends that you use HP-branded cartridges in the MSL6000 Tape Library to assure the highest level of protection for your valuable data. The test program for HP media is the most thorough and comprehensive in the industry.

All HP cartridges must satisfy an exhaustive battery of additional tests that relate directly to real life situations, where real data and real businesses are at stake. The benefit of the HP brand specification for media is consistent quality. Through the testing of thousands of HP drives and HP cartridges, the ideal formulation for backup performance is defined and then continuously monitored. This hugely resource-intensive process is unique to HP and affords deep insight into the HP+HP backup solution for a wide range of environments and duty cycles. Your best choice for ease of support and maximum dependability is to use HP-branded Ultrium cartridges at all times.

HP strongly encourages the use of bar code labels on tapes to track media and ensure optimum library performance and usability. Correctly labeling your media will allow the library to quickly determine media and drive compatibility.



Compatibility

HP's extensive compatibility testing program assures that your HP MSL6000 Tape Library works with leading servers, operating systems, and backup applications - and not just those sold by HP. The MSL6000 works seamlessly in many environments, making them especially suitable if you have a mixed system environment. For the latest list of servers, workstations, operating systems, and backup software that support the MSL6000, check the HP Enterprise Backup Solution compatibility matrix at:

<http://www.hp.com/go/ebs>.

Server Compatibility

The MSL6000 is supported on a wide range of HP systems. For details of which MSL6000 works with which systems, including third-party systems, reference the EBS compatibility matrix at:

<http://www.hp.com/go/ebs> for the latest hardware compatibility information.

OS Support

Reference the EBS compatibility matrix for the most up-to-date OS compatibility information at:

<http://www.hp.com/go/ebs>.

Software Support

Reference the EBS compatibility matrix for the most up-to-date software compatibility information at:

<http://www.hp.com/go/ebs>.



Service and Support, HP Care Pack, and Warranty Information

Warranty The warranty for this product consists of one-year, next business day, onsite.

Warranty Upgrade Options

- Response - Upgrade on-site response from next business day to same day 4-hours
- Coverage - Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours
- Duration - Select duration of coverage for a minimum period of 1 year to multiple years

HP Care Pack Information HP Care Pack is defined as an upgrade to the product warranty attribute, available for a specific duration and hours of coverage.

- HP Care Pack is not available for less than the products warranty duration.
- HP Care Pack is available for sale anytime during the warranty period for most products, but the commencement date will be the same as the warranty start date (delivery date to end user customer). Proof of purchase may be required.
- HP Care Pack services are prepaid.

For additional HP Care Pack (hardware & software) information, as well as orderable part numbers, please refer to the URL <http://www.hp.com/hps/carepack/>.

Hardware Product Services

- Installation services
- On-site Maintenance (includes warranty support)
- Response time upgrades during the warranty period
- Post-warranty coverage
- RAID setup and performance consulting via statement of work

For additional hardware installation and maintenance information please refer to the URL <http://www.hp.com/hps/hardware/>.

eSupport HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: <http://www.hp.com/support>.



Service and Support, HP Care Pack, and Warranty Information

Support Services

HP Services provides up to a three-year, limited warranty, fully supported by a worldwide network of resellers and service providers and 9x5 hardware technical phone support during the warranty period. In addition, available service offerings include a full range of optional packaged hardware and software services:

- Installation and start up
- Extended coverage hours and enhanced response times
- System management and performance services
- Availability and recovery services

Components

The following brick level options/components do not have individual HP Care Pack Services. These items will be included in product HP Care Pack Services into which they are installed.

Disk Drives	Tape Drives	CD/DVD ROM	SCSI Hubs in SBBs	Adapters
Bus Converters	Backplane RAID Controllers	Power Supplies	Cabling	Fans



Configuration Information

NOTE: The HP MSL6000 Tape Library comes standard as a rack-ready unit and includes a rack kit specifically designed for HP 10000/9000/5000 series racks. If the library will be installed into a HP System/E or Alpha rack, then a separate rack kit must also be purchased.

NOTE: Each library includes a 110/220 VAC power cord for US/Canada/Mexico (1 per 5U unit; 2 per 10U unit). For additional or specific regional power cord requirements, separate power cords must be ordered.

Step 1 – Select a Configuration

Select one:

Model Name	Model Description	Part Number
HP MSL6030 Tape Library	HP MSL6030 1 LTO-4 Ultrium 1840 Drive Library	AJ029A
	HP MSL6030 1 LTO-4 Ultrium 1840 Drive 4Gb FC Library	AJ030A
	HP MSL6030 1 LTO-3 Ultrium 960 Drive Library	AD606B
	HP MSL6030 2 LTO-3 Ultrium 960 Drive Library	AD607B
	HP MSL6030 1 LTO-3 Ultrium 960 Drive 4Gb FC Library	AD608B
	HP MSL6030 2 LTO-3 Ultrium 960 Drive 4Gb FC Library	AD609B

NOTE: The HP MSL6030 Tape Library supports 30 media slots (including one configurable mail slot) and up to two Ultrium tape drives (number of drives determined by SKU chosen). Additional drives can be added for a maximum of 2 drives per library module. The tape library ships as a rack-ready unit.

Kit Contents (for each library):

- 12' 110/220 VAC US/Mexico/Canada Power Cord (1 per 5U unit)
- .5M VHDCI SCSI cable (1 per tape drive and 1 per FC card)
- (1) RJ-11 Serial cable
- VHDCI SCSI terminator (1 per tape drive)
- Rack mount hardware including template poster (for use with HP 10000/9000/5000 series racks)
- Documentation kit including Getting Started Poster and User's Guide (CD)

NOTE: Each MSL6030 library installation will require, one (1) library system, one (1) geographically specific power cord (if other than US 110/220 VAC), and up to 30 HP data cartridges with bar code labels. SCSI applications will require (1) SCSI host cable for each drive. Fibre Channel applications will require one (1) Fibre Channel cable for each drive pair. Multi-unit configurations will require additional pass-through kits. Installation services may also be ordered for customers who prefer to have a certified HP engineer perform on-site library installation.

HP MSL6060 Tape Library	HP MSL6060 2 LTO-4 Ultrium 1840 Drive Library	AJ031A
	HP MSL6060 2 LTO-4 Ultrium 1840 Drive 4Gb FC Library	AJ032A
	HP MSL6060 2 LTO-3 Ultrium 960 Drive Library	AD610B
	HP MSL6060 2 LTO-3 Ultrium 960 Drive 4Gb FC Library	AD611B

NOTE: The HP MSL6060 Tape Library ships with 60 media slots (including two configurable mail slots), redundant power supplies, and two Ultrium tape drives (number of drives determined by SKU chosen). Additional drives can be added for a maximum of 4 drives per library module. The tape library ships as a rack-ready unit.

Kit Contents (for each library):

- 12' 110/220 VAC US/Mexico/Canada Power Cord (1 per 5U unit; 2 per 10U unit)
- .5M VHDCI SCSI cable (1 per tape drive and 1 per FC card)



Configuration Information

- (1) RJ-11 Serial cable
- VHDCI SCSI terminator (1 per tape drive)
- Rack mount hardware including template poster (for use with HP 10000/9000/5000 series racks)
- Documentation kit including Getting Started Poster and User's Guide (CD)

NOTE: Each MSL6060 library installation will require (1) library system, (2) geographically specific power cords (if other than US 110/220 VAC) and up to 60 data cartridges with bar code labels. SCSI applications will require one (1) SCSI host cable for each drive. Fibre Channel applications will require one (1) Fibre Channel cable for each drive pair. Multi-unit configurations will require additional pass-through kits. Installation services may also be ordered for customers who prefer to have a certified HP engineer perform an on-site library installation.

Step 2 - Select The Appropriate Rack Kit

Select one per library unit:

Rack Kits	Description	Part Number
	HP MSL System/E Rack Mount Kit NOTE: Required to install a rack-ready MSL5000 or MSL6000 Tape Library into a HP System/E rack; one kit required per library being racked.	AG164A
	HP MSL 5U Tabletop to 10K Rack Conversion Kit NOTE: Required to install a tabletop MSL5000 or MSL6000 Tape Library into a HP 10000/9000/5000 series rack; one kit required per library being racked.	AG162A
	HP MSL 5U Tabletop to Alpha/HP Rack Conversion Kit NOTE: Required to install a MSL5000 or MSL6000 Tape Library into an Alpha rack; one kit required per library being racked. NOTE: Depending on the environment, different rack kits are required. Each rack-ready MSL6000 Tape Library includes a rack kit designed for HP 10000/9000/5000 series racks. If installing into these racks, no additional kits are needed. If the environment is different, one of the above kits is necessary for racking (one per library).	AG161A

Step 3 - Select The Appropriate Power Cord

Select one per 5U library unit or two per 10U library unit:

Power Cords	Description	Part Number
	Power Cord, US, C13, 10A, 1.83m NOTE: This cord ships standard with each MSL6000 Tape Library (1 per 5U unit; 2 per 10 unit) NOTE: Can be used to connect the rack-mounted device to PDUs with NEMA 5-15R receptacles.	AF556A
	PDU Power Cord, C13/C14, 10A, 2.5m NOTE: Can be used to connect the rack-mounted device to PDUs with IEC-320 receptacles.	142257-002
	Power Cord, Euro, C13, 10A, 1.83m	AF568A
	Power Cord, UK, C13, 10A, 1.83m	AF570A
	Power Cord, Danish, C13, 10A, 1.83m	AF566A
	Power Cord, Swiss, C13, 10A, 1.83m	AF565A
	Power Cord, Italian, C13, 10A, 1.83m	AF571A
	Power Cord, South Africa, C13, 10A, 2.5m	AF567A



Configuration Information

Power Cord, Taiwan, C13, 12A, 1.83m	AF561A
Power Cord, China, C13, 10A, 1.83m	AF557A
Power Cord, Japan, C13, 12A, 2m	AF572A
Power Cord, Australia, C13, 10A, 2.5m	AF569A
Power Cord, Argentina, C13, 10A, 2.5m	AF558A
Power Cord, Brazil, C13, 10A, 1.83m	AF559A
Power Cord, Korea, C13, 10A, 1.83m	AF560A
Power Cord, Israel, C13, 10A, 1.83m	AF564A
Power Cord, India, C13, 10A, 2.0m	AF562A

NOTE: One power cord required for each MSL6030; two power cords required for each MSL6060. Select the correct power cord for your geographical location.

WARNING: Use of a non-HP approved Power Cord may result in (1) use of a power cord that does not meet individual country specific safety requirements; (2) a power cord with insufficient conductor amperage that could result in overheating with potential personal injury and/or property damage; and/or (3) an unapproved power cord could fracture resulting in the internal contacts being exposed which potentially could subject the user to a shock hazard. Use ONLY an HP approved power cord for your particular country. HP disclaims all liability in the event a non-HP approved power cord is used.



Related Options

Factory Racking	Factory integrate the MSL6000 Tape Library with other HP products such as HP ProLiant Servers. NOTE: #0D1 will appear after the MSL part number on the sales order if HP factory integration is selected.	#0D1
Tape Drives	HP MSL6000 LTO-4 Ultrium 1840 Tape Drive NOTE: For use in the MSL5000 Ultrium libraries; data transfer rates up to 80 MB/s. NOTE: For use in the MSL6000 Ultrium libraries; data transfer rates up to 160 MB/s.	AJ028A
	HP MSL6000 LTO-3 Ultrium 960 Drive NOTE: For use in the MSL5000 Ultrium libraries; data transfer rates up to 80 MB/s. NOTE: For use in the MSL6000 Ultrium libraries; data transfer rates up to 160 MB/s. NOTE: For details on MSL drive upgrade compatibility, reference the Business Class Libraries Drive Upgrade matrix at: ftp://ftp.compaq.com/pub/products/storageworks/techdoc/tapestorage/MSL_drivematrix.pdf	AD612B
FC Interface Card	HP e1200-320 4Gb Fibre Channel Interface Card NOTE: One FC interface card kit required for every two tape drives; for use in the MSL5000 or MSL6000 Tape Libraries.	AD577A
Slot Expansion Modules	HP MSL6030 0 Drive Ultrium Library NOTE: A zero drive library which includes 30 slots; to be used with either MSL5000 or MSL6000 Ultrium libraries.	AD597B
	HP MSL6060 0 Drive Ultrium Library NOTE: A zero drive library which includes 60 slots; to be used with either MSL5000 or MSL6000 Ultrium libraries.	AD602B
Pass-Through Mechanism Hardware	HP MSL Universal Pass-Through Mechanism Base Unit NOTE: Includes elevator mechanism and router; required to connect first two 5U units in a stack or to connect a single 10U unit to additional units (extenders required for the additional units); capable of handling both SDLT and LTO media.	AG163A
	HP MSL 10U Pass-Through Extender NOTE: Supported by the MSL 10U Tape Libraries only; one required for each unit connected to the stack, for second unit and additional units.	AG160A
	HP MSL 5U Pass-Through Extender NOTE: Supported by the MSL 5U Tape Libraries only; one required for each unit connected to the stack, beyond the first 10U of units.	AG159A
Magazines	HP MSL Ultrium Universal Magazine NOTE: For use in the MSL5000 or MSL6000 Tape Libraries; includes two 15-slot magazines (left and right set).	AD621A



Related Options

Rack to Tabletop Conversion	HP MSL6000 5U Rack to Table Top Conversion Kit	AD622B
	NOTE: Can also be used with the MSL5000 Tape Libraries.	
	HP MSL6000 10U Rack to Table Top Conversion Kit	AD627B
	NOTE: Can also be used with the MSL5000 Tape Libraries.	
<hr/>		
Rack Cabinets	10622 (22U) Universal Rack Cabinet - Shock Pallet	AF022A
	10636 (36U) Universal Rack Cabinet - Shock Pallet	AF012A
	10636 (36U) Universal Rack Cabinet with extension - Shock Pallet	AF014A
	10642 (42U) Universal Rack Cabinet - Shock Pallet	AF002A
	10642 (42U) Universal Rack Cabinet with extension - Shock Pallet	AF004A
	NOTE: The MSL Tape Libraries are certified to ship in HP 10000 series racks which include a shock pallet. It is mandatory to use a shock pallet in order to ship racks with equipment installed.	
	5642 (42U) Rack Cabinet	358254-B21
	NOTE: This rack ships unassembled and boxed on a standard size pallet. It is an industry standard 19" wide rack with side panels and rear doors; does not ship with the front door or casters.	
	NOTE: for additional HP ProLiant rack information, visit http://h18004.www1.hp.com/products/servers/proliantstorage/racks/index.html	
<hr/>		
Cable Kits	6 ft VHDCI/VHDCI SCSI Cable Kit	341174-B21
	12 ft VHDCI/VHDCI SCSI Cable Kit	341175-B21
	6 ft VHDCI/HDTS68 SCSI Cable Kit	341176-B21
	12 ft VHDCI/HDTS68 SCSI Cable Kit	341177-B21
	2m SW LC/SC FC Cable Kit	221691-B21
	5m SW LC/SC FC Cable Kit	221691-B22
	15m SW LC/SC FC Cable Kit	221691-B23
	2m SW LC/LC FC Cable Kit	221692-B21
	5m SW LC/LC FC Cable Kit	221692-B22
	15m SW LC/LC FC Cable Kit	221692-B23
<hr/>		
Host Bus Adapters	HP U320e SCSI Host Bus Adapter	AH627A
	NOTE: Recommended Dual Channel Ultra320 SCSI Controller for connecting multi-drive MSL Tape Libraries to HP ProLiant Servers.	
	For more information on HBAs please consult the EBS connectivity matrix at http://www.hp.com/go/ebs .	
<hr/>		



Related Options

Media	LTO Ultrium Media	
	HP LTO4 Ultrium 1.6TB RW Data Cartridge (1 pack)	C7974A
	HP LTO4 Ultrium 1.6TB WORM Data Cartridge (1 pack)	C7974W
	HP Ultrium 800GB RW Data Cartridge (1 pack)	C7973A
	HP Ultrium 800GB WORM Data Cartridge (1 pack)	C7973W
	HP Ultrium 400GB data cartridge (1 pack)	C7972A
	HP Ultrium Universal Cleaning Cartridge (1 pack)	C7978A
	HP LTO4 Ultrium RW Bar Code Labels (100 pack)	Q2009A
	HP LTO4 Ultrium WORM Bar Code Labels (100 pack)	Q2010A
	HP Ultrium 3 RW Bar Code Labels (100 pack)	Q2007A
	HP Ultrium 3 WORM Bar Code Labels (100 pack)	Q2008A
	HP Ultrium 2 Bar Code Labels (100 pack)	Q2002A
	Non-Custom Labeled Data Cartridges	
	NOTE: Non-Custom labels will come pre-labeled with a pre-determined number sequence.	
	HP LTO4 Ultrium 1.6TB RW Non-Custom Labeled Data Cartridge (20 pack)	C7974AN
	HP Ultrium 800GB RW Non-Custom Labeled Data Cartridge (20 pack)	C7973AN
	HP Ultrium 400GB Non-Custom Labeled Data Cartridge (20 pack)	C7972AN
	HP Ultrium 200GB Non-Custom Labeled Data Cartridge (20 pack)	C7971AN
	Custom Labeled Data Cartridges	
	NOTE: Custom labeled products allow customers to customize a specific sequence printed on each label.	
	HP LTO4 Ultrium 1.6TB RW Custom Labeled Data Cartridge (20 pack)	C7974AL
	HP LTO4 Ultrium 1.6TB WORM Custom Labeled Data Cartridge (20 pack)	C7974WL
	HP Ultrium 800GB RW Custom Labeled Data Cartridge (20 pack)	C7973AL
	HP Ultrium 800GB WORM Custom Labeled Data Cartridge (20 pack)	C7973WL
	HP Ultrium 400GB Custom Labeled Data Cartridge (20 pack)	C7972AL
	HP Ultrium 200GB Custom Labeled Data Cartridge (20 pack)	C7971AL
	Storage Media Kits	
	NOTE: Kit includes 20 data cartridges, one cleaning cartridge, 20 colored labels, a protective carrying case that can be used to securely store or transport data cartridges, one copy of "The Essentials of Successful Tape Backup," and one copy of HP Data Protector Express Evaluation Software (60 day free trial).	
	HP Ultrium 800GB Storage Media Kit	C8017A
	HP Ultrium 400GB Storage Media Kit	C8014A
	HP Ultrium 200GB Storage Media Kit	C8013A
	SDLT600 Media	
	HP SDLT II 600GB Data Cartridge	Q2020A
	HP SDLT Cleaning Cartridge	C7982A
	HP SDLT II Bar Code Label Pack	Q2006A



Related Options

HP Care Pack Services

MSL6030 Non-configurable Care Packs

Installation (electronic)	U4823E
HW, 3-year, next-day, onsite (electronic)	U2859E
HW, 3-year, same-day, 13x5, 4 hour response, onsite (electronic)	U2860E
HW, 3-year, same-day, 24x7, 4 hour response, onsite (electronic)	U2861E
HW, 3-year, same-day, 6 hour call to repair, onsite (electronic)	U9287E
Installation & startup for SAN environments (electronic)	UA871E

MSL6060 Non-configurable Care Packs

Installation (electronic)	U4824E
HW, 3-year, next day, onsite (electronic)	U2862E
HW, 3-year, same day, 13x5, 4 hour response, onsite (electronic)	U2863E
HW, 3-year, same day, 24x7, 4 hour response, onsite (electronic)	U2864E
HW, 3-year, same day, 6 hour call to repair, onsite (electronic)	U9288E
Installation & startup for SAN environments (electronic)	UA872E

NOTE: Support Plus covers Hardware support only.

Hewlett Packard also offers 1-year options for the services quoted above.

Due to the complexities involved with the initial installation of an enterprise Library into a SAN environment, Hewlett Packard recommends that customers take advantage of the SAN Implementation Service (UA871E or UA872E). This service covers pre-installation preparation activities, installation and configuration of the library and router, configuration of hosts and switches, verification testing and customer orientation.

In order to maximize ROI and product uptime, and minimize the cost of ownership, Hewlett-Packard recommends the 3-year, 24 x 7 service options. These offerings will ensure that any product issue can be tackled when they occur (most back up issues will occur outside standard business hours) and that the service coverage regarding period, covers the minimum expected life of the host system.



Technical Specifications

Form Factor		MSL6030 Tape Library	MSL6060 Tape Library
		5U Rack-mount	10U Rack-mount
Dimensions		MSL6030 Tape Library	MSL6060 Tape Library
	Out-of-Box (HxWxD)	8.75 x 17.00 x 30.00 in (22.22 x 43.18 x 76.20 cm)	17.50 x 17.00 x 30.00 in (44.45 x 43.18 x 76.20 cm)
	Shipping (HxWxD)	15.25 x 23.00 x 38.25 in (38.73 x 58.42 x 97.15 cm)	33.00 x 47.00 x 31.00 in (83.62 x 119.38 x 78.74 cm)
Weight		MSL6030 Tape Library	MSL6060 Tape Library
	Out-of-Box (0-drive)	43.0 lb (19.50 kg)	95.0 lb (43.99 kg)
	Shipping (0-drive)	75.0 lb (34.01 kg)	147.0 lb (66.67 kg)
	Out-of-Box (1-drive)	47.6 lb (21.59 kg)	N/A
	Shipping (1-drive)	79.6 lb (36.10 kg)	N/A
	Out-of-Box (2-drive)	52.2 lb (23.67kg)	104.2 lb (47.26 kg)
	Shipping (2-drive)	84.2 lb (38.19 kg)	156.2 lb (70.85 kg)
Capacity		MSL6030 Tape Library	MSL6060 Tape Library
LTO-4 Ultrium 1840	Base unit	24 TB (native) 48 TB (compressed)	48 TB (native) 96 TB (compressed)
	Maximum configuration	192 TB (native) 384 TB (compressed) NOTE: 8 modules with multi-unit scalability	192 TB (native) 384 TB (compressed) NOTE: 4 modules with multi-unit scalability
LTO-3 Ultrium 960	Base unit	12 TB (native) 24 TB (compressed)	24 TB (native) 48 TB (compressed)
	Maximum configuration	96 TB (native) 192 TB (compressed) NOTE: 8 modules with multi-unit scalability	96 TB (native) 192 TB (compressed) NOTE: 4 modules with multi-unit scalability
Maximum Transfer Rate		MSL6030 Tape Library	MSL6060 Tape Library
LTO-4 Ultrium 1840	Base unit	864 GB/hr (native) 1.7 TB/hr (compressed) NOTE: 2 drives per library	1.7 TB/hr (native) 3.45 TB/hr (compressed) NOTE: 4 drives per library
	Maximum configuration	6.9 TB/hr (native) 13.8 TB/hr (compressed) NOTE: 8 modules, 16 drives with multi-unit configuration	6.9 TB/hr (native) 10.9 TB/hr (compressed) NOTE: 4 modules, 16 drives with multi-unit configuration
LTO-3 Ultrium 960	Base unit	576 GB/hr (native) 1.15 TB/hr (compressed) NOTE: 2 drive configuration	1.15 TB/hr (native) 2.3 TB/hr (compressed) NOTE: 4 drive configuration
	Maximum configuration	4.6 TB/hr (native) 9.2 TB/hr (compressed) NOTE: 8 modules, 16 drives with multi-unit scalability	4.6 TB/hr (native) 9.2 TB/hr (compressed) NOTE: 4 modules, 16 drives with multi-unit scalability
Interface		Ultra320 LVD SCSI, VHDCI interconnect (Ultrium 1840/ 960) 4Gb Fibre Channel (Ultrium 1840/ 960)	



Technical Specifications

Reliability	MTBF	250,000 hours (100% duty cycle; excludes drives)	
	MSBF	2,000,000 robot load/unload cycles	
Acoustic Noise		MSL6030 Tape Library	MSL6060 Tape Library
	Noise Power Emission Level	8 bels, maximum	8 bels, maximum
	Avg Sound Pressure Level	52 dBA	52 dBA
Heat Dissipation		MSL6030 Tape Library	MSL6060 Tape Library
	Typical	612 BTU's/hour	1020 BTU's/hour
	Maximum	671 BTU's/hour	1224 BTU's/hour
Power Consumption		MSL6030 Tape Library	MSL6060 Tape Library
	Base unit	Auto-ranging	Auto-ranging
	Voltage	100 to 240 VAC, ±10% @ 50 to 60Hz, ±5%	100 to 240 VAC, ±10% @ 50 to 60Hz, ±5%
Power Requirement		MSL6030 Tape Library	MSL6060 Tape Library
	Typical	180 Watts	300 Watts
	Maximum	240 Watts	440 Watts
Robotics Performance		MSL6030 Tape Library	MSL6060 Tape Library
	Initialization time	100 sec	240 sec
	Inventory time	60 sec	110 sec
	Cartridge swap (drive to slot)	8 sec average	15 sec average NOTE: 35 sec average cartridge swap time for 4 scaled modules.
Relative Humidity (non-condensing)	Operating	10 to 80% @ 82° F (28° C)	
	Shipping	10 to 90% @ 82° F (28° C)	
Temperature Range	Operating	50° to 95° F (10° to 35° C)	
	Shipping	-40° to 140° F (-40° to 60° C)	

© Copyright 2011 Hewlett-Packard Development Company, L.P.
The information contained herein is subject to change without notice.

Windows NT is a US registered trademark of Microsoft Corporation. Unix is a registered trademark of The Open Group.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For tape drives and media, 1 GB = 1 billion bytes. Actual formatted capacity is less.

