


Overview

The HP StoreEver 1/8 G2 Tape Autoloader provides a cost-effective, easy-to-install, unattended backup that is ideal for an entry-level or remote office automated backup solution. The HP 1/8 G2 autoloader combines incredible storage density and tape library features into a compact 1U form factor. Capable of up to 24TB of compressed capacity in only a 1U form factor, the autoloader is well equipped to offer room for uncertain data growth. Web-based remote management offers the capability to quickly and easily access, configure, monitor, and troubleshoot the autoloader that will reduce dependencies on local IT staff while allowing multiple sites to be supported centrally. Protect confidential business information with native encryption, ensuring that if a tape is lost or stolen your data is protected from unauthorized access. Proactively monitor utilization, operational performance, as well as life and health information for both the drive and media with TapeAssure.

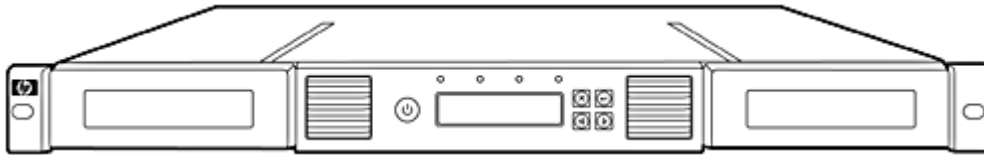

What's New

LTO-6 Ultrium 6250 half-height SAS and FC tape drives and LTO-6 Ultrium 6250 tape media are now available, improving performance by 44% and more than doubling the storage capacity of the autoloader.

Key Features

- The HP 1/8 G2 Tape Autoloader packs the maximum amount of storage into the minimum amount of space. LTO-6 Ultrium 6250 tape technology delivers 50 TB of compressed capacity (2.5:1) in a 1U form factor.
- Easy to install, manage and use integrated solution
- Protect and secure your data with native autoloader encryption
- Predictive and proactive monitoring with Tape Assure
- Integrated web-based remote management
- Flexible tape technology and interface choices to suit your needs
- Easy to use and manage
- Customer serviceable and replaceable components
- Yosemite Backup Basic Software for a complete out of the box solution.

Overview

Family Comparison	1/8 G2 LTO-6 Ultrium 6250 Tape Autoloader	1/8 G2 LTO-5 Ultrium 3000 Tape Autoloader	1/8 G2 LTO-4 Ultrium 1760 Tape Autoloader
Drive Technology	Ultrium 6250	Ultrium 3000	Ultrium 1760
Capacity (compressed 2.5:1)	50 TB		
Capacity (compressed 2:1)		24 TB	12.8 TB
Maximum Data Transfer (compressed 2.5:1)	1.44 TB/hr		
Maximum Data Transfer (compressed 2:1)		1.0 TB/hr	576 GB/hr
Interface	8 Gb/sec Fibre Channel (LTO 6 only) 6 Gb/sec SAS (LTO 6 only)	8 Gb/sec Fibre Channel (LTO 5 only) 6 Gb/sec SAS (LTO 5 only)	3 Gb/sec SAS (LTO 5, 4, 3) Ultra320 LVD SCSI (LTO 4, 3)

Product Highlights

Easy Installation

The 1/8 G2 Tape Autoloader ships as a rack-ready unit. A separate 1/8 G2 Tape Autoloader Rack Kit must be purchased to allow installation in a variety of HP racks which include the 10000 series, 9000 series, 5000 series and System/E racks.

A set of rubber feet are included in the box if you choose to use the unit on a tabletop or desk. For additional structural rigidity, HP recommends the purchase of the 1/8 G2 Rack-to-Tabletop conversion kit which has a maximum load of 33 pounds (15 kilograms) and fully encloses the unit.

Data Protector backup and recovery software

If the Autoloader is for a large environment that requires UNIX support and/or enterprise class application and feature support then HP Data Protector is the recommended backup and recovery software. If current or future requirements will require Data Protector, this software should be installed from day 1.

For more information and evaluation software please visit: <http://www.hp.com/go/dataprotector>.

Linear Tape File System (LTFS)

HP LTFS makes tape self-describing, file-based, and easy-to-use, it also provides users with the ability to use standard file operations on tape media for accessing, managing and sharing files with an interface that behaves just like a hard disk. In addition, LTFS provides the ability to share data across platforms, as you would with a USB drive or memory stick. Simply load a tape into the drive, mount it into the file system, and it becomes visible as a disk. For more information, including user guide, downloads and compatibility, visit: <http://www.hp.com/go/ltfs>

HP StoreOpen Automation

HP StoreOpen Automation is a free downloadable application that extends the LTFS capability to HP Autoloaders, HP MSL and ESL G3 Tape Libraries. By simply mounting the tape autoloader or library as a file system, the intuitive HP StoreOpen Automation interface makes it easier to copy, rename, create or move files. When a cartridge folder is selected for use, that tape is automatically moved to an available tape drive.

For more information, including user guide, downloads and compatibility, visit: <http://www.hp.com/go/HPStoreOpen>

Manageability

The 1/8 G2 Tape Autoloader allows web-based remote manageability; the unit can be monitored and managed from across the room or across the globe. Functions included in the management tool include:

- Status information on the drive and system
- System configuration operations and reporting
- System error and status logs
- Library and drive firmware upload capabilities
- Diagnostic tests and information
- Cartridge movement for maintenance and management purposes
- Cleaning cartridge support
- Security and access control
- SNMP support for IP communications

Product Highlights

Proven Reliability

With a rating of 2,000,000 robot load/unload cycles, the 1/8 G2 Tape Autoloader provides necessary high reliability for today's demanding environment. To improve reliability and longevity, all HP Ultrium products feature Data Rate Matching (DRM). This allows the tape drive to dynamically and continuously adjust the speed of the drive, from 7 MB/s to 140 MB/s, to match the speed of the host or network. This increases performance, reduces mechanical wear on the tape drive and extends tape life.

Longevity

Organizations need to be confident that their data in archive is still there when they need it. LTO tape media is specified with a 30 year shelf life in normal ambient conditions.

Disaster Recovery and Security

Removable media also has the advantage that data is held 'offline' which means that archive data on tape has the additional level of protection from the threats to on-line data from viruses, hackers and cyber-attacks. LTO-6, LTO-5, and LTO-4. Ultrium tape drives include hardware based data encryption to prevent unauthorized access to data at rest and cartridges are available with write-once-read-many (WORM) capability to prevent accidental overwriting of data archived on the tape. Both WORM and hardware data encryption features help organizations to comply with increased data security regulations.

Encryption

The HP 1/8 G2 & MSL Encryption Kit provides a library-enabled encryption solution that greatly enhances data privacy, confidentiality, and integrity of your critical business data while supporting compliance requirements. While there are a wide range of encryption solutions available, the HP 1/8 G2 & MSL Encryption Kit is intended to be an easy and affordable library-enabled solution for small businesses.

Protect the confidentiality and integrity of your data:

The encryption kit includes two USB key server tokens, product documentation, and firmware support. One encryption kit is needed per library or autoloader and it must be physically accessible so that the USB token can be inserted into the automation device. One of the two tokens will plug into the USB port in the autoloader or library and will generate and maintain encryption keys for the LTO-6, LTO-5 and LTO-4 drives/libraries. The USB key server token uses a hardware random number generator, a cryptographic module running on FIPS 140-2 Level 3 validated hardware, password authentication, and digital envelopes for strong encryption keys and security operations. The second USB token is intended to provide a backup to the first. The keys are transferred securely token-to-token for backup or export, with no exposure to insecure PCs, servers, or networks. The encryption kit provides a self-contained solution for MSL libraries with no additional software, PCs, or servers required or involved.

Protect IT resources and meet compliance requirements:

With the HP 1/8 G2 & MSL Encryption Kit, users can enable or disable encryption, configure the USB key server tokens, restore encrypted data, as well as a variety of other tasks. In addition, the LTO-6, LTO-5 and LTO-4 tape drives use the Advanced Encryption Standard (AES) with the longest and most secure keys -- 256 bits. AES-256 encryption is implemented using the Galois Counter Mode (GCM). This method adds Message Authentication Codes to ensure the integrity as well as privacy of the backup data stored on tape. The HP LTO-6 LTO, 5, and LTO-4 Ultrium Tape Drives are designed to be compliant with the standard for tape media security (IEEE 1619.1).

Product Highlights

LTO Ultrium Technology HP LTO (Linear Tape Open) Ultrium Tape Drives use best of breed technology. By taking the best features from other tape technologies and combining them into a single new technology, Ultrium tape drives are in a league of their own. Inclusion of innovative features such as Adaptive Tape Speed (ATS) ensure that Ultrium LTO technology is an open drives can meet the performance and reliability demands of a library environment. Industry standard format; thus data written on HP Ultrium Tape Drives can be interchanged directly with Ultrium Tape Drives from other vendors.

Investment protection HP LTO tape drives and automation products are founded on the LTO open standard and adhere to the published LTO format roadmap to Generation 8. With built-in two generation backwards read compatibility, LTO customers can be assured of investment protection.

Data Rate Matching Data Rate Matching combines sophisticated buffer management with the HP exclusive variable Adaptive Tape Speed technology, to allow the tape drive to match its transfer rate to the host speed dynamically and continuously across the wide range of transfer rates. This feature ensures that the tape drive continues to stream data regardless of the environment, and brings three big advantages:

- It optimizes performance and maximizes overall efficiency, allowing the drive to respond immediately to any speed changes from the host.
- It minimizes rewinding and repositioning of the tape, significantly reducing physical wear and increasing reliability.
- It minimizes the power requirements for the drive by reducing the number of repositions needed.

LTO Ultrium Tape Drive	ATS data transfer rate range (native)
HP LTO-6 Ultrium 6250	54 to 160 MB/s
HP LTO-5 Ultrium 3000	47 to 140 MB/s
HP LTO-4 Ultrium 1760	33 to 80 MB/s

HP Ultrium WORM

Critical to the success of data retention policies in highly regulated environments is the ability to store and manage data in an unalterable state. Following stringent guidelines set forth by regulatory agencies such as the SEC and HIPPA, IT organizations must now integrate new solutions and policies that can verify the integrity of stored data for periods that can extend well beyond seven years.

The LTO-6, LTO-5, LTO-4, and LTO-3 Ultrium tape drives feature the ability to archive and store data in a non-rewriteable format that meets the most stringent regulatory guidelines. Using a combination of integrated fail-safe features in the drive firmware, cartridge memory, and tape formatting, the LTO-6, LTO-5, LTO-4, and LTO-3 Ultrium can archive large amounts of data for periods of up to 30 years in a secure, untampered state. Since all LTO-6, LTO-5, LTO-4, and LTO-3 Ultrium tape drives include support for both rewritable and WORM media, IT organizations can now easily integrate a secure, long-term archiving solution into their current data protection strategy. As compared to other technologies that feature support for WORM storage, the LTO-6, LTO-5, LTO-4 and LTO-3 Ultrium tape drives offer the advantages of:

- A single drive to support all backup and archiving needs
- Two distinctive tape cartridges to easily distinguish and manage both rewriteable and WORM data cartridges
- A specially designed WORM data cartridge with multiple integrated fail-safe features to prevent accidental or intentional overwriting of data
- Support from many backup and archiving software vendors, providing the most comprehensive and mainstream support in the industry

Product Highlights

- The LTO open standard that offers greater choice and compatibility across all third- and fourth-generation LTO Ultrium products

NOTE: While all HP LTO-6, LTO-5, and LTO-4 Ultrium tape drives support LTO Ultrium WORM media, some third, fourth and fifth -generation LTO Ultrium tape drives from other manufacturers may not include read and write support for LTO Ultrium WORM media. For non-HP third- and fourth-generation LTO Ultrium tape drives, please check the manufacturers' specifications to ensure this support is provided if you are using your WORM media. If WORM support is not provided, the drive will eject the WORM tape cartridge immediately upon insertion into the tape drive.

HP Library and Tape Tools The 1/8 G2 Tape Autoloader is supported on The HP industry-leading diagnostic tool - HP Library and Tape Tools (L&TT). L&TT is a single, convenient program that's a snap to install and simple to operate. L&TT's intuitive user interface eliminates the need for training and deploys in less than five minutes. This robust diagnostic tool is designed for both the experienced professional and the untrained administrator. It ensures product integrity through self-diagnostics and fast resolution to device concerns. Additional information on L&TT plus download information can be found at: <http://www.hp.com/support/tapetools>.

HP Storage Media

HP recommends that you use HP-branded cartridges in the 1/8 G2 Tape Autoloader to assure the highest level of protection for your valuable data. The test program for HP media is the most thorough and comprehensive in the industry.

All HP cartridges must satisfy an exhaustive battery of additional tests that relate directly to real life situations, where real data and real businesses are at stake. The benefit of the HP brand specification for media is consistent quality. Through the testing of thousands of HP drives and HP cartridges, the ideal formulation for backup performance is defined and then continuously monitored. This hugely resource-intensive process is unique to HP and affords deep insight into the HP+HP backup solution for a wide range of environments and duty cycles. Your best choice for ease of support and maximum dependability is to use HP-branded Ultrium cartridges at all times.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Customization must comply with all relevant product specifications and factory supported configurations.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, and HP 9000 servers as well as MSA, VA7xxx, EVA, and XP disk arrays, rackable tape libraries and configurable network switches.

Type of service support varies by platform and product family. For more information on Factory Express services for your specific server model or storage device please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

Compatibility

Compatibility

The HP extensive compatibility testing program assures that your HP 1/8 G2 Tape Autoloader works with leading servers, operating systems, and backup applications - and not just those sold by HP. The 1/8 G2 Tape Autoloader works seamlessly in many environments, making them especially suitable if you have a mixed system environment. For the latest list of servers, workstations, operating systems, and backup software that support the 1/8 G2 Tape Autoloader, check the HP Enterprise Backup Solution compatibility matrix at: <http://www.hp.com/go/ebs>.

NOTE: The 1/8 G2 Tape Autoloader requires an HBA with multiple LUN support and should not be used with RAID or Array controllers

Server Compatibility

The 1/8 G2 Tape Autoloader is supported on a wide range of HP systems. For details of which 1/8 G2 Tape Autoloader works with which systems, including third-party systems, reference the EBS compatibility matrix at: <http://www.hp.com/go/ebs> for the latest hardware compatibility information.

OS Support

Reference the EBS compatibility matrix for the most up-to-date OS compatibility information at: <http://www.hp.com/go/ebs>.

Software Support

Reference the EBS compatibility matrix for the most up-to-date software compatibility information at: <http://www.hp.com/go/ebs>.

Service and Support, HP Care Pack, and Warranty Information

Warranty The warranty for this product consists of 1-year parts exchange, next business day.

For increased uptime, productivity and ROI -HP Care Pack packaged services for Storage

These days, you need to get the most out of your storage investment-you can't afford not to. When you buy HP storage products and solutions, it's also a good time to think about what levels of service and support you may need. To help take the worry out of deploying, designing, maintaining, and managing your environment, we've designed a portfolio of service options that are as: flexible, reliable and scalable as your storage. Unlike storage-only vendors, we take a holistic approach to your entire environment, bridging storage, servers, blades, software and network infrastructures with our HP Care Pack packaged services for Storage.

Protect your business beyond the warranty

When it comes to robustness and reliability, standard warranties on today's computing equipment have matured just as the technologies have matured. Good news on some fronts-but also a source of potential problems and subsequent consequences that come from depending on standard warranties alone. Standard warranty protects against product defects and some causes of downtime- but not the business. By using a standard approach to warranty uplifts, such as HP Care Pack Services, you can reduce downtime risks and be more certain of operational consistency for both mission-critical and standard business computing. Simply put, HP Care Pack Services normalize the warranty of combined products - helping you proactively guard against unplanned downtime.

Extending warranties with HP Care Pack Services

For cost-effective upgrading or extending your standard warranty, HP Care Pack Services offer a suite of standard reactive hardware and software support services that are sold separately, or combined as with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition, with HP Proactive Select we offer an innovative approach to service delivery that gives you the flexibility to acquire the specific proactive services you need today, then add services as your needs evolve. HP Proactive Select offers a broad set of technical or per-event type service options - including server, storage, and network, SAN device, and software, environment, installation and education services. Services that you can mix and match depending on your specific requirements, from preliminary planning and equipment delivery to installation, configuration, integration, and testing, through every level of ongoing support. Our HP Care Pack packaged services for Storage assures help when you need it most. And for many products, post-warranty HP Care Pack Services are available when your original warranty has expired.

HP Storage Services: Offering reliability, flexibility and value-just like your storage

HP Storage Services offers a full spectrum of customer care, from technology support to complex migrations to complete completely managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education offers flexible, comprehensive training on storage networking, disk storage systems, and storage software to help your IT staff get the most out of your investments. And HP Financial solutions extend innovative financing and asset management programs to cost-effective buy, manage and eventually retire your older equipment.

HP Storage Services, the trusted business technology experts who manage your technology in action, because when technology works, business works. <http://www.hp.com/services/storage>

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at <http://www.hp.com/go/lookuptool>

Service and Support, HP Care Pack, and Warranty Information

Recommended HP Care Pack Services for optimal satisfaction with your HP product.

Recommended Services **3-Year HP Support Plus 24**

For a higher return on your storage investment, HP Support Plus 24 provides integrated hardware and software support services designed specifically for your technology. Available 24x7, this 3-year combined reactive support option delivers onsite hardware support and over-the-phone software support around-the-clock. Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.

- Improve uptime with responsive hardware and software services
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP software at a predictable cost
- Increase customer satisfaction-with no interoperability gaps

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EN.pdf>

HP Install Storage Autoloader/Tape Drive Array Service

For smooth startup and better business outcomes, HP Install Storage Autoloader/Tape Drive Array Service- this service provides initial hardware installation into your server technology environment (system configuration is not included). Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.

- Allows your IT resources to stay focused on their core tasks and priorities
- Reduces implementation time, impact and risk to your storage environment

<http://h71028.www7.hp.com/ERC/downloads/5981-9356EN.pdf>

HP Proactive Select Service

HP Proactive Select Service improves your IT performance and manageability through the use of cost effective flexible services. HP provides technical expertise and best practices to accelerate ROI of your technology investment. Selectable proactive services span a wide range of technology and process services - a flexible way to purchase proactive services that fit your particular environment and situation.

HP Proactive Select Service is technology agnostic and purchased in addition to your choice of underlying reactive support.

- Access to a list of flexible and customizable proactive service activities
- Enhance customers' in-house IT team with complementary assistance from HP
- Improved time to solution
- Reduce business risk and project costs by accessing HP specialists
- Simplify IT operational procedures by leveraging HP best practices

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-3842ENN.pdf>

Service and Support, HP Care Pack, and Warranty Information

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit <http://www.hp.com/support>

Customer Technical Training

Consider education as an integral part of your strategy to get the best return on investment for your HP storage solution. HP offers a variety of training courses on storage software, networking, archiving and disk storage systems. Our classes are available in many delivery modalities from traditional instructor-led courses at one of our 80 training centers worldwide to on-site training customized to your needs or online. www.hp.com/learn/storage

HP Services Awards

HP Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction. For a list of all our awards, please visit <http://h20219.www2.hp.com/services/cache/433028-0-0-225-121.htm>

Additional Services Information

For more information about HP Care Pack Services for Storage, please visit: <http://www.hp.com/services/storage>

If you have specific questions, contact your local HP representative. Contact information for a representative in your area can be found at "Contact HP" <http://www.hp.com>

Configuration Information

NOTE: The HP StoreEver 1/8 G2 Tape Autoloader comes standard as a one drive, 8-slot unit (includes both a right and left 4-slot magazine) which is shipped rack-ready. A separate 1/8 G2 Tape Autoloader Rack Kit must be purchased to complete the rack installation. The HP 1/8 G2 Tape Autoloader ships with a PDU power cord (C13/C14, 10A, P/N 142257-002). If a 110V receptacle power cord is needed please order (P/N AF556A). For power cord options, please visit: HP Power Cord Link: www.hp.com/products/powercords

Step 1 – Base Configuration

Select one:

Model Name	Model Description	Part Number
Model Name	HP StoreEver 1/8G2 LTO-6 Ultrium 6250 SAS Tape Autoloader	COH18A
HP StoreEver 1/8 G2 Tape Autoloader	HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	COH19A
	HP StoreEver 1/8G2 LTO-5 Ultrium 3000 FC Tape Autoloader	BL541B
	HP StoreEver 1/8 G2 LTO-5 Ultrium 3000 SAS Tape Autoloader	BL536B
	HP StoreEver 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader	AK377B
	HP StoreEver 1/8 G2 LTO-4 Ultrium 1760 SCSI Tape Autoloader	AJ816B

Kit Contents (for each autoloader):

- **SCSI models:**
 - (1) 2.5M PDU Power Cord, C13/C14, 10A
 - (1) 6' VHDCI to HDTS68 SCSI cable
 - (1) RJ-45 Ethernet cable
 - (1) HDTS68 SCSI terminator
 - Set of six rubber feet (for tabletop use)
 - Getting Started Poster
 - Flyer for Yosemite Server Backup software
- **SAS models:**
 - (1) 2.5M PDU Power Cord, C13/C14, 10A
 - (1) 2M External Infiniband (SFF8470) to Mini SAS (SFF8088) 1x SAS Cable
 - (1) RJ-45 Ethernet cable
 - Set of six rubber feet (for tabletop use)
 - Getting Started Poster
 - Flyer for Yosemite Server Backup software
- **FC models:**
 - (1) 2.5M PDU Power Cord, C13/C14, 10A
 - (1) RJ-45 Ethernet cable
 - Set of six rubber feet (for tabletop use)
 - Getting Started Poster
 - Flyer for Yosemite Server Backup software

Configuration Information

Step 2 - Additional Options

Select each required option with quantities specified:

Power Cord	Quantity	Description	Part Number
	1 each	Power Cord, US, C13, 10A, 1.83m NOTE: This cord does not ship standard with 1/8 G2 Tape Autoloader.	AF556A
	1 each	PDU Power Cord, C13/C14, 10A, 2.5m NOTE: This cord ships standard with each 1/8 G2 Tape Autoloader; can be used to connect the rack-mounted device to PDUs with IEC-320 receptacles.	142257-002
	1 each	Power Cord, Euro, C13, 10A, 1.83m	AF568A
	1 each	Power Cord, UK, C13, 10A, 1.83m	AF570A
	1 each	Power Cord, Danish, C13, 10A, 1.83m	AF566A
	1 each	Power Cord, Swiss, C13, 10A, 1.83m	AF565A
	1 each	Power Cord, Italian, C13, 10A, 1.83m	AF571A
	1 each	Power Cord, South Africa, C13, 10A, 2.5m	AF567A
	1 each	Power Cord, Taiwan, C13, 12A, 1.83m	AF561A
	1 each	Power Cord, China, C13, 10A, 1.83m	AF557A
	1 each	Power Cord, Japan, C13, 12A, 2.0m	AF572A
	1 each	Power Cord, Australia, C13, 10A, 2.5m	AF569A
	1 each	Power Cord, Argentina, C13, 10A, 2.5m	AF558A
	1 each	Power Cord, Brazil, C13, 10A, 1.83m	AF559A
	1 each	Power Cord, Korea, C13, 10A, 1.83m	AF560A
	1 each	Power Cord, Israel, C13, 10A, 1.83m	AF564A
	1 each	Power Cord, India, C13, 10A, 2.0m	AF562A

NOTE: One power cord is required; please select the correct power cord for your geographical location.

WARNING: This product can ONLY be used with an HP approved power cord for your specific geographic region. Use of a non-HP approved power cord may result in: 1) not meeting individual country specific safety requirements; 2) insufficient conductor capacity that could result in overheating with potential personal injury and/or property damage; and 3) an unapproved power cord could fracture resulting in the internal contacts being exposed, which potentially could subject the user to a shock hazard. HP disclaims all liability in the event a non-HP approved power cord is used.

Related Options

Factory Racking	Factory integrate the 1/8 G2 Tape Autoloader with other HP products such as HP ProLiant Servers. NOTE: #0D1 will appear after the 1/8 G2 Tape Autoloader part number on the sales order if HP factory integration is indicated. HP Factory Rack Mount Shelf Kit NOTE: Required to safely ship the 1/8 G2 Tape Autoloader via the factory integration option (#0D1); shelf can be removed after the rack is received at the customer site.	#0D1 AB469A
Rack Kit	HP StoreEver 1/8 G2 Tape Autoloader Rack Kit NOTE: Required to install the unit in a standard 19-inch rack; includes rails and rackmount instructions.	AH166A
Rack-to-Tabletop Conversion Kit	HP StoreEver 1/8 G2 Rack-to-Tabletop Conversion Kit NOTE: For use in converting the rack-ready 1/8 G2 Tape Autoloader into a structurally rigid and fully enclosed tabletop model; maximum load up to 33 pounds (15 kilograms).	AH199A
Magazine Kit	HP StoreEver 1/8 G2 Right Magazine Kit NOTE: For use only on the right side of the 1/8 G2 Tape Autoloader; additional 4-slot magazine. HP StoreEver 1/8 G2 Tape Autoloader Left Magazine Kit NOTE: For use only on the left side of the 1/8 G2 Tape Autoloader; additional 4-slot magazine which includes an import/export slot.	AH167A AH862A
Encryption	HP StoreEver 1/8 G2 & MSL Tape Library Encryption Kit. NOTE: For use with new or installed LTO-5 or LTO-4 Ultrium 1/8 G2 Tape Autoloaders and MSL2024/4048/8048/8096 Tape Libraries. The encryption token will generate and retain encryption keys for HP LTO-6, LTO-5 or LTO-4 Ultrium tape drives in the autoloader or library.	AM495A
Rack Cabinets	The 1/8 G2 Tape Autoloader is supported in a variety of HP Rack offerings from 22U to 42U high racks, including the HP Intelligent Series Racks and the HP 10000 G2 Series Racks. For more information on the HP rack offerings, please see the following URL: http://h18004.www1.hp.com/products/servers/platforms/rackandpower.html NOTE: The 1/8 G2 Tape Autoloader is certified to ship in HP racks that include a shock pallet. It is mandatory to use a shock pallet in order to ship racks with equipment installed.	

Related Options

FC Host Bus Adapters

The 1/8 G2 Tape Autoloader is certified with a number of HP Fibre Channel Host Bus Adapters. For the most current list of supported FC HBAs, please see the HP Storage EBS (Enterprise Backup Solutions) Compatibility Matrices document and EBS Design Guide located at: www.hp.com/go/ebs.

For more information on FC HBAs, please see Fibre Channel Host Bus Adapters at: <http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>.

SAS Host Bus Adapters

The 1/8 G2 Tape Autoloader is certified with a number of HP SAS Host Bus Adapters. For the most current list of supported SAS HBAs, please see the HP Storage EBS (Enterprise Backup Solutions) Compatibility Matrices document and EBS Design Guide located at: www.hp.com/go/ebs.

For more information on SAS HBAs, please see Fibre Channel Host Bus Adapters at: <http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>.

SCSI Host Bus Adapters

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter

412911-B21

NOTE: Single channel PCI-Express (PCI-e) SCSI Ultra 320 HBA that enables HP MSL Tape Libraries to connect to HP ProLiant servers.

Reference the EBS compatibility matrix for the most up-to-date HBA compatibility information at: <http://www.hp.com/go/ebs>.

Cable Kits (SCSI, SAS, FC)

6 ft VHDCI/HDTS68 SCSI Cable Kit

341176-B21

12 ft VHDCI/HDTS68 SCSI Cable Kit

341177-B21

HP External SAS to mini-SAS Fanout Cable

AH587A

NOTE: One cable is required for every four autoloaders or every four library drives. Use this cable to connect HP MSL SAS Tape Libraries to HP SAS controllers with Infiniband (SFF8470) connectors.

HP 2m External Mini-SAS to 4x1 Mini-SAS Cable

AN975A

NOTE: One cable is required for every four autoloaders or every four library drives. Use this cable to connect HP MSL SAS Tape Libraries to Mini-SAS (SFF8088) ports.

4m External mini-SAS to 4x1 mini-SAS Cable Kit

AN976A

NOTE: One cable is required for every four autoloaders or every four library drives. Use this cable to connect HP MSL SAS Tape Libraries to Mini-SAS (SFF8088) ports.

HP SAS Min-Min 1x-2M Cable Assembly Kit

AE470A

NOTE: One SAS autoloader only. Use this cable to connect HP SAS external tape devices to HP SAS controllers with external Mini-SAS (SFF8088) connectors.

HP SAS MIN-MIN 1X-4M Cable Assembly Kit

AE465A

NOTE: One SAS autoloader only. Use this cable to connect HP SAS external tape devices to HP SAS controllers with external Mini-SAS (SFF8088) connectors.

Related Options

Optical cables

OM4 LC-LC type cables

HP Premier Flex LC/LC Multi-mode OM4 fiber 1m Cable	QK732A
HP Premier Flex LC/LC Multi-mode OM4 fiber 2m Cable	QK733A
HP Premier Flex LC/LC Multi-mode OM4 fiber 5m Cable	QK734A
HP Premier Flex LC/LC Multi-mode OM4 fiber 15m Cable	QK735A
HP Premier Flex LC/LC Multi-mode OM4 fiber 30m Cable	QK736A
HP Premier Flex LC/LC Multi-mode OM4 fiber 50m Cable	QK737A

Allowed cable lengths:

Drive type	External Cable type	2Gb	4Gb	8Gb
All	OM2	0.5m - 300m	0.5m - 150m	.5-50m
All except LTO-5 Ultrium 3000	OM3/OM4	0.5m - 500m	0.5m - 380m	0.5m - 150m
LTO-5 Ultrium 3000	OM3/OM4	0.5m - 300m	0.5m - 150m	0.5m - 50m

Controller/HBA & Cable Recommendation Matrix

Recommended HBA/ Controller for tape automation

HBA/ Controller Product Number

SAS	HP SC44Ge SAS Host Bus Adapter	416096-B21
	NOTE: Recommended for Proliant G5 SAS tape automation connect.	
	Recommended Cable for SC44Ge HP External SAS to mini-SAS Fanout Cable	AH587A
	HP P212 Smart Array Controller Zero Memory	462828-B21
	NOTE: Recommended for Proliant G6 SAS tape automation connect. 256MB or larger write cache recommended for more than two tape drives.	
	HP P212 Smart Array Controller 256MB Memory	462834-B21
	NOTE: Recommended for Proliant G6 SAS tape automation connect.	
	HP P411 Smart Array Controller 256MB	462830-B21
	NOTE: Recommended for Proliant G6 SAS tape automation connect.	
	HP P411 Smart Array Controller 512MB	462832-B21
	NOTE: Recommended for Proliant G6 SAS tape automation connect.	
	HP P711m Smart Array Controller 1G FBWC	513778-B21
	NOTE: Recommended for C series blade enclosure tape automation connect.	
HP P712m Smart Array Controller 256MB	488348-B21	
NOTE: Recommended for C series blade enclosure tape automation connect.		
HP P700m Smart Array Controller 256MB	507925-B21	
NOTE: Recommended for C series blade enclosure tape automation connect.		
HP P700m Smart Array Controller 512MB	508226-B21	
NOTE: Recommended for C series blade enclosure tape automation connect.		
Recommended Cables for Smart Array Controllers	For one autoloader:	
	HP SAS Min-Min 1x-2M Cable Assembly Kit	AE470A
	NOTE: one SAS tape drive only.	

Related Options

HP SAS MIN-MIN 1X-4M Cable Assembly Kit AE465A
NOTE: one SAS tape drive only.

For two or more autoloaders or tape drives:

HP 2m External Mini-SAS to 4x1 Mini-SAS Cable AN975A
NOTE: One cable is required for every four drives.

HP 4m External Mini-SAS to 4x1 Mini-SAS Cable AN976A
NOTE: One cable is required for every four drives

SCSI	HP SC11Xe SCSI Host Bus Adapter	412911-B21
	NOTE: Single channel PCI-Express (PCI-e) SCSI Ultra 320 HBA.	
	6 ft VHDCI/HDTS68 SCSI Cable Kit	341176-B21
	12 ft VHDCI/HDTS68 SCSI Cable Kit	341177-B21
	12 ft VHDCI/HDTS68 SCSI Cable Kit	341177-B21

Controller information (both SAS and SCSI) are located in two locations:

Smart Array: <http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html>

HBA: <http://h18004.www1.hp.com/products/servers/proliantstorage/adapters/index.html>

Reference the EBS compatibility matrix for the most up-to-date HBA compatibility information at:

<http://www.hp.com/go/ebs>

You may also visit: www.hp.com/go/ProLiant, and click on the Storage link

Media	HP LTO-6 Ultrium 6.25TB MP RW Data Cartridge (1 pack)	C7976A
	HP LTO-6 Ultrium 6.25TB BaFe RW Data Cartridge (1 pack)	C7976B
	HP LTO-5 Ultrium 3TB RW Data Cartridge (1 pack)	C7975A
	HP LTO-5 Ultrium 3TB WORM Data Cartridge (1 pack)	C7975W
	HP LTO-4 Ultrium 1.6TB RW Data Cartridge (1 pack)	C7974A
	HP LTO-4 Ultrium 1.6TB WORM Data Cartridge (1 pack)	C7974W
	HP LTO-3 Ultrium 800GB RW Data Cartridge (1 pack)	C7973A
	HP LTO-3 Ultrium 800GB WORM Data Cartridge (1 pack)	C7973W
	HP LTO-2 Ultrium 400GB Data Cartridge (1 pack)	C7972A
	HP LTO-1 Ultrium 200GB Data Cartridge (1 pack)	C7971A
	HP Ultrium Universal Cleaning Cartridge (1 pack)	C7978A
	Bar Code Labels	
	HP LTO-6 Ultrium RW Bar Code Label Pack (100 pack)	Q2013A
	HP LTO-5 Ultrium WORM Bar Code Label Pack (100 pack)	Q2012A
	HP LTO-5 Ultrium RW Bar Code Label Pack (100 pack)	Q2011A
	HP LTO-5 Ultrium WORM Bar Code Label Pack (100 pack)	Q2012A
	HP LTO-4 Ultrium RW Bar Code Labels (100 pack)	Q2009A
	HP LTO-4 Ultrium WORM Bar Code Labels (100 pack)	Q2010A
	HP LTO-3 Ultrium RW Bar Code Labels (100 pack)	Q2007A
	HP LTO-3 Ultrium WORM Bar Code Labels (100 pack)	Q2008A

Related Options

HP LTO-2 Ultrium Bar Code Labels (100 pack)	Q2002A
HP LTO-1 Ultrium Bar Code Labels (100 pack)	Q2001A

Custom labeled Data Cartridges

NOTE: Custom labeled products allow customers to customize a specific sequence printed on each label.

HP LTO-6 Ultrium 6.25TB MP RW Custom Labeled Data Cartridge (20 pack)	C7976AL
HHP LTO-5 Ultrium 3.0TB RW Custom Labeled Data Cartridge (20 Pack)	C7975AL
HP LTO-5 Ultrium 3.0TB RW Custom Labeled No Case Data Cartridge (20 pack)	C7975AC
HP LTO-5 Ultrium 3.0TB WORM Custom Labeled Data Cartridge (20 pack)	C7975WL
HP LTO4 Ultrium 1.6TB RW Custom Labeled Data Cartridge (20 pack)	C7974AL
HP LTO4 Ultrium 1.6TB WORM Custom Labeled Data Cartridge (20 pack)	C7974WL
HP LTO-3 Ultrium 800GB RW Custom Labeled Data Cartridge (20 pack)	C7973AL
HP LTO-3 Ultrium 800GB WORM Custom Labeled Data Cartridge (20 pack)	C7973WL
HP LTO-2 Ultrium 400GB Custom Labeled Data Cartridge (20 pack)	C7972AL
HP LTO-1 Ultrium 200GB Custom Labeled Data Cartridge (20 pack)	C7971AL

Non-Custom Labeled Data Cartridges

NOTE: Non-Custom labels will come pre-labeled with a pre-determined number sequence.

HP LTO-6 Ultrium 6.25TB MP RW Non-Custom Labeled Data Cartridge (20 pack)	C7976AN
HP LTO-6 Ultrium 6.25TB BaFe RW Non-Custom Labeled Data Cartridge (20 pack)	C7976BN
HP LTO-5 Ultrium 3.0 TB Non-custom Labeled Data Cartridge (20 Pack)	C7975AN
HP LTO-4 Ultrium 1.6TB RW Non-Custom Labeled Data Cartridge (20 pack)	C7974AN
HP LTO-3 Ultrium 800GB RW Non-Custom Labeled Data Cartridge (20 pack)	C7973AN
HP LTO-2 Ultrium 400GB Non-Custom Labeled Data Cartridge (20 pack)	C7972AN
HP LTO-1 Ultrium 200GB Non-Custom Labeled Data Cartridge (20 pack)	C7971AN

Storage Media Kits

NOTE: Kit includes 20 HP Ultrium data cartridges, one HP Ultrium Universal cleaning cartridge, 20 colored labels, a protective carrying case that can be used to securely store or transport data cartridges, and one copy of "The Essentials of Successful Tape Backup"

HP Ultrium 800GB Storage Media Kit	C8017A
HP Ultrium 400GB Storage Media Kit	C8014A
HP Ultrium 200GB Storage Media Kit	C8013A

NOTE: For more information on LTO media, see: <http://h18006.www1.hp.com/storage/storagemedia.html?psn=storage>

Related Options

HP Care Pack Options

Same Day Response

Warranty upgrade to 1-year, 13x5, 4 hour response/onsite, electronic	U6364E
Warranty upgrade to 1-year, 24x7, 4 hour response/onsite, electronic	U6365E
Warranty upgrade to 1-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	U6366E
Warranty upgrade to 3-year, 13x5, 4 hour response/onsite, electronic	H5526E
Warranty upgrade to 3-year, 24x7, 4 hour response/onsite, electronic	H4624E
Warranty upgrade to 3-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	U6367E
Warranty upgrade to 5-year, 13x5, 4 hour response/onsite, electronic	U9376E
Warranty upgrade to 5-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	U9377E

Next Business Day Response

Warranty upgrade to 3-year next business day/parts exchange, electronic	H2698E
Warranty upgrade to 3-year next business day/onsite, electronic	H4619E

Hardware Services

Installation services, electronic	U2090E
-----------------------------------	--------

NOTE: In order to maximize ROI and product uptime, and minimize the cost of ownership, Hewlett-Packard recommends the 3-year, 24 x 7 service options. These offerings will ensure that any product issue can be tackled when they occur (most back up issues will occur outside standard business hours) and that the service coverage regarding period, covers the minimum expected life of the host system.

Technical Specifications

		1/8 G2 LTO-6 Ultrium 6250 Tape Autoloader	1/8 G2 LTO-5 Ultrium 3000 Tape Autoloader	1/8 G2 LTO-4 Ultrium 1760 Tape Autoloader
Drive Technology		Ultrium 6250	Ultrium 3000	Ultrium 1760
Number of Drives		1	1	1
Number of Slots		8	8	8
Drive Interface		8Gb/sec Fibre Channel 6Gb/sec SAS	8Gb/sec Fibre Channel 6Gb/sec SAS	3Gb/sec SAS (LTO 4, 3) Ultra320 LVD SCSI (LTO 4, 3)
Capacity	Native	20 TB	12 TB	6.4 TB
	Compressed (2.5:1)	50 TB		
	Compressed (2:1)		24TB	12.8 TB
Maximum Transfer Rate	Native	576 GB/hr	504 GB/ hr	288 GB/hr
	Compressed (2.5:1)	1.44 TB/hr		
	Compressed (2:1)		1 TB/hr	576 GB/hr
Dimensions	Out-of-Box (HxWxD)	1.7 x 19 x 31.9 in (4.4 x 48.2 x 80.9 cm)		
	Shipping (HxWxD)	10 x 23 x 39 in (25 x 58 x 99 cm)		
Weight	Out-of-Box	25.4 lb (11.5 kg)		
	Shipping	33.7 lb (15.3 kg)		
NOTE: The weight of the Autoloader varies a slight amount with the type of LTO drive used.				
Reliability	MSBF (mean swaps between failures)	2 Million robot load/unload cycles		
	MTBF (mean time between failures)	100,000 hours (based on 1M MSBF)		
Cartridge Swap Time		34 seconds average (drive to slot, slot to drive)		
Initialization Time		76 seconds		
Inventory Time		52 seconds (with bar code labeled cartridges)		
Connectors		Mini-SAS (located on back of 1/8 G2 SAS models only) 68-pin HDTs (located on back of 1/8 G2 SCSI models only) (1) RJ-45 (located on back of 1/8 G2) (1) USB port (located on back of 1/8 G2)		

Technical Specifications

LED Indicators (on front panel)	Ready LED (Green): shows ready status information Clean LED (Amber): shows fault status information Attention LED (Amber): shows fault status information Error LED (Amber): shows fault status information		
Management Interface	10/100 Mbytes/second, auto-configuring interface. RJ-45 connection. Https configurable.		
Power	80 Watts (max)		
Input Requirements	100 to 240 VAC, 50 to 60 Hz		
Relative Humidity (non-condensing)	10-80%RH		Operating
	90% RH		Shipping
Temperature Range (wet bulb)	5°C to 40°C		Operating
	-40°C to 60°C		Shipping
Altitude	15,000 feet		Operating
	35,000 feet		Shipping

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For tape drives and media, 1 GB = 1 billion bytes. Actual formatted capacity is less.