

SONY



SRG-120DU

USB 3.0 Full HD PTZ Camera

1/2.8-type
Exmor CMOS

12x Optical

16 Presets*1

IP Control

71° Field of
View

1080/60p

View-DR

1.8 lx Min.
Illumination

USB 3.0

*1 Presets x 16 when controlled via VISCA. Presets x 6 when using the supplied IR remote commander

Sony proudly introduces the **USB 3.0 desktop type Pan-Tilt-Zoom camera SRG-120DU** that achieves superb picture quality utilizing Sony's latest imaging technology and 1080/60p resolution.

The **SRG-120DU** provides outstanding simplicity in bringing professional visual communications to the PC environment by connectivity with software-based videoconferencing systems, **UCC (Unified Communications and Collaborations)** systems and multimedia streaming systems. Therefore, the **SRG-120DU** is an ideal choice for the applications like conference rooms, boardrooms and huddle rooms as well as classrooms and medical spaces.

Simple Connect with USB 3.0

The SRG-120DU provides exquisite operability by the direct connection with a computer via a USB 3.0 interface. With the capability of high-speed data transfer at up to 5 Gbps by USB 3.0, the SRG-120DU transfers uncompressed video signals at 1080/60p.

Excellent Picture Quality

The SRG-120DU incorporates Sony's high-sensitivity 1/2.8-type Exmor™ CMOS sensor and the latest View-DR™ technology. It delivers excellent picture quality in professional remote shooting. View-DR™ function provides an extremely wide dynamic range of 130dB* through Sony's sophisticated image processing technology. This is realized by the Exmor™ CMOS sensor's high-speed readout capability and Visibility Enhancer (VE) which provides a high level of chrominance and luminance. Furthermore XDNR™ function reduces noise and provides clear images in both moving and still objects under low light conditions.



View-DR OFF



View-DR ON

* Simulated images
* Dynamic range performance varies according to camera settings.

1080/60p


The 1/2.8-type Exmor CMOS sensor achieves superb Full HD (1920 x 1080) picture quality. Furthermore, 60-fps progressive scan technology results in smooth motion with reduced blur. Therefore the SRG-120DU can capture extremely clear images even if an object is moving.

View-DR

Exmor™

12x Effective Power Zoom

The SRG-120DU provides up to 12x optical zoom and 12x digital zoom, which results in tremendous 144x High Power Zoom in total. It's very beneficial when close-up images are required.

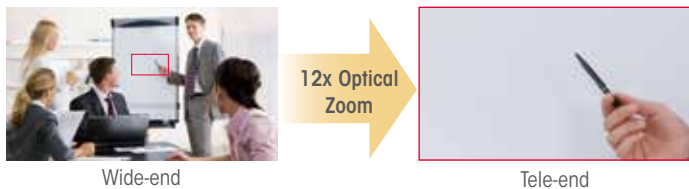

* Simulated images

VISCA-over-IP

The SRG-120DU can be controlled via the VISCA™ protocol over IP connections, as well as a RS-232. It is compatible with Sony's RM-IP10 IP Remote Controller to enable comfortable pan, tilt, and zoom operation with an optical three-axis joystick.

Specifications

SRG-120DU	
Camera	
Image Sensor	1/2.8 Exmor CMOS
Image Sensor (Number of Effective Pixels)	Approx. 2.1 Megapixels
Signal System	1080/59.94p, 50p, 29.97p, 25p 720/59.94p, 50p, 29.97p, 25p
Minimum Illumination (50IRE)	1.8 lx (50IRE, F1.8, 30 fps)
S/N Ratio	50 dB
Gain	Auto/Manual (0 to +43 dB)
Shutter Speed	1/1 to 1/10000 sec (59.94 Hz system) 1/1 to 1/10000 sec (50 Hz system)
Exposure Control	Auto, Manual, Priority AE (Shutter, Iris), Exposure compensation, Bright
White Balance	Auto, Indoor, Outdoor, One-push auto, ATW, Manual
Optical Zoom	12x
Digital Zoom	12x
Focusing System	Auto/Manual
Horizontal Viewing Angle	71 degree (Wide)
Focal Length	f=3.9 mm (Wide) to 46.8 mm (Tele) F1.8 to 2.0
Minimum Object Distance	10 mm (Wide) ~ 1500 mm (Tele)
Pan/Tilt Angle	Pan: ±100° Tilt: ±25°
Pan/Tilt Speed (Max.)	Pan: 300°/sec Tilt: 126°/sec
Preset Position	16*
Camera Features	
Auto ICR	No
Wide-D	Yes
Image Stabilizer	No
Image Flip	No
Auto Power Off	No
Night Power Off	No
Interface	
HD Video Output	USB 3.0
SD Video Output	-
Camera Control Interface	RS-232/RJ-45
Sync. System	INT
General	
Power Requirements	DC 12 V (DC 10.8 to 13.2 V)
Power Consumption	16.8 W
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to +60°C (-4°F to +140°F)
Dimensions (W x H x D)	153 x 156 x 153 mm (6 1/8 x 6 1/4 x 6 1/8 inches)
Mass	1.45 kg (3 lb 3.1 oz)
Body Color	Silver
Wide Conversion Lens Attachable	No
Mountable Angle	±15°
Ceiling Mount	No
Supplied Accessories	AC power adaptor (1), AC power cable (1), IR remote commander unit (1)

* Presets x 16 when controlled via VISCA. Presets x 6 when using the supplied IR remote commander.

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel.: +49 711 997 996 3
www.maxxvision.com

Other Features

• Wide Field of View

The SRG-120DU provides a wide horizontal viewing angle of 71 degrees. It's ideal for the usage at small- and mid-sized rooms.

• High Sensitivity

The SRG-120DU provides superb sensitivity of minimum illumination 1.8 lx, which enables capturing images in low light environments.

• Compact and Stylish Body


Its all-in-one compact and lightweight design makes this camera easy to install in a variety of locations.

• Quick and Silent Pan, Tilt, and Zoom


The SRG-120DU features quick and silent pan, tilt, and zoom capabilities. It's ideal for use in noise-restricted environments such as classrooms and meeting rooms.

System Configurations

Software-based Videoconferencing Systems and UCC Systems

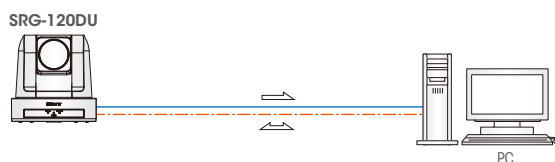

Multimedia Streaming Systems

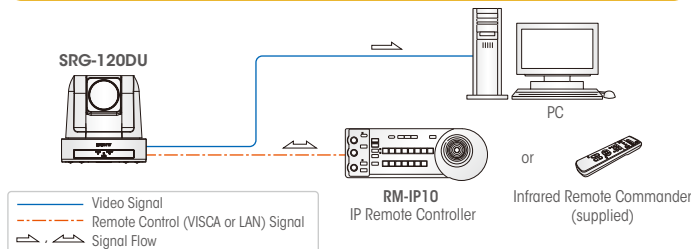

Peripheral Equipment



RM-IP10

IP Remote Controller

- Comfortable P/T/Z operation with the optical three-axis joystick
- Versatile camera adjustment by simple panel operation
- The use of IP technology allows flexible installation and easy operation

©2015 Sony Corporation. All rights reserved.

Reproduction in whole or in part without written permission is prohibited. Features, design, and specifications are subject to change without notice. The values for mass and dimension are approximate.

"SONY", "Exmor", "XDNR", and "View-DR" are trademarks of Sony Corporation.

Distributed by