

# NEC MultiSync® X552SPG

Order Code: 60003432

NEC LCD 55" PublicDisplays\_Specialty

The superslim MultiSync® X552S PG with protection glass delivers the longevity and reliability customers expect from a public display thanks to a professional public display panel and proven NEC engineering excellence. The reduced depth and light weight makes it easy to handle and integrate while the new slim option slot STv2 allows for the integration of powerful slot-in PCs and other option slot products.

Ideal for a wide array of applications such as retail signage including 24/7, transport applications, conference rooms, lobby / reception installations and integration in totems and furniture, the MultiSync® X552S PG offers flexible installation combined with industry leading performance.



## DELIVERING GENUINE BENEFITS

**Special Conturan® Coating** - anti-reflective glass with dual-sided optical interference coatings between 50 to 100 nm thick provide reduced reflection and resultantly high light transmission for an unrestricted view of display content.

**Colour Calibration** - the display can be hardware colour calibrated to make sure e.g. customer's logo are displayed accurately.

**Super slim design** - only 51.1 mm total depth.


**Programmable Ambient Light Sensor** - for reduced power consumption and eye pleasing brightness levels.

**Ease of Installation and Operation** - free LAN control software for central, convenient and cost-efficient maintenance and control. Automatic alarm emails notify the user of problems if they should occur.

**Effective protection** - of the LED panel with 4 mm thermally toughened glass.

## OUTSTANDING PERFORMANCE

- Thanks to **Edge LED back light technology** the display comes with superslim and light weight design which enables integration in extremely slim cabinets and installations with space constraints.
- **Unique NEC heat management** enables the user to monitor and control the heat inside the display with user controllable fans. Ideal for heavy duty applications or integration jobs.
- **Slot Technology version 2** allows for the integration of single board computers and other option slot products without the need to stow external equipment.
- **Integrated speakers** save installation costs and preserve the clean look of the screen.
- The **optional NEC wall mount** emphasizes the slim design of the product and adds a mere 7,5mm making the installation 58,6mm deep.
- **Peace of mind** thanks to full control of the display via LAN with free NEC software and alert emails in the unlikely event of a problem such as no signal, overheating, back light failure etc.
- **Daisy chaining via DVI** (max. 9 pieces) offering high flexibility at no extra cost if the signal needs to be passed on for videowalls or back-to-back installations.

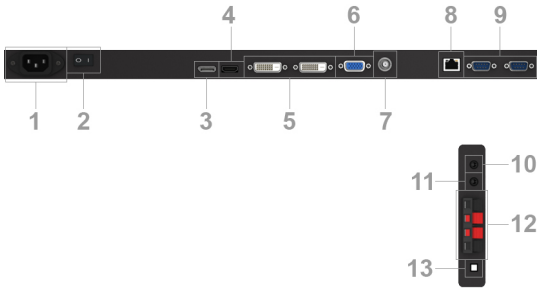

1. Power
2. Main Switch
3. DisplayPort in
4. HDMI in
5. DVI in / out
6. D-sub with VGA, Component, Composite and S-Video
7. Composite in
8. LAN with SNMP
9. External control RS-232 in / out
10. Audio out
11. Audio in
12. External speakers
13. Internal / external speaker switch

**SPECIAL CHARACTERISTICS**

Advanced fan control, Copy display settings through RS232, Daisy chaining via DVI (max. 9 units), DICOM support, Hardware colour calibration possible, Input name adjustment, Matrix memory, OSD rotation for portrait mode, Programmable ambient light sensor, Rapid input switching, Scheduler, Screen saver functions, SNMP LAN, TileMatrix (10 x 10), User input priority definition, Various picture in picture options



**Energy Efficiency** Ambient light sensor; LED backlight; Carbon savings meter; ECOMode

**Ecological Materials** Mercury free; Optional feet; Manuals on CD

**Ecological Standards** Energy Star 5.1

Technical Specification NEC MultiSync® X552SPG	
<b>DISPLAY</b>	
Panel Technology	S-PVA with edge LED backlights
Active Screen Area (W x H) [mm]	1,209 x 680
Screen Size [inch/cm]	54.5 / 138.8
Aspect Ratio	16:9
Brightness (shipping) [cd/m²]	500, (700 max)
Contrast Ratio (typ.)	4000:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8 (grey-to-grey)
Panel Refresh Rate [Hz]	60
<b>SYNCHRONISATION RATE</b>	
Horizontal Frequency [kHz]	31.5 - 91.1
Vertical Frequency [Hz]	50 - 85
<b>RESOLUTION</b>	
Native Resolution	1920 x 1080 at 60 Hz
Supported on digital and analogue inputs (PC)	1024 x 768; 1280 x 1024; 1280 x 720; 1280 x 768; 1280 x 800; 1280 x 960; 1366 x 768; 1400 x 1050; 1600 x 1200; 1680 x 1050; 1920 x 1080; 640 x 480; 720 x 400; 720 x 576; 800 x 600
Supported on digital inputs (Video)	1280 x 720p (50)16:9; 1280 x 720p (59.94/60)16:9; 1920 x 1080i (50)16:9; 1920 x 1080i (59.94/60)16:9; 1920 x 1080p (23.97/24)16:9; 1920 x 1080p (25)16:9; 1920 x 1080p (29.97/30)16:9; 1920 x 1080p (50)16:9; 1920 x 1080p (59.94/60)16:9; 720 x 480p (59.94/60)16:9; 720 x 576p (50)16:9
<b>CONNECTIVITY</b>	
Input Video Analogue	1 x D-sub 15 pin; 1 x S-Video; Composite (BNC)
Input Video Digital	1 x DVI-D (with HDCP); 1 x HDMI (with HDCP); 1 x DisplayPort (with HDCP)
Input Audio Analogue	1 x 3,5 mm jack
Input Audio Digital	Display Port; 1x HDMI
Input Control	LAN 100Mbit; RS232
Output Video Digital	1 x DVI-D (with HDCP)
Output Audio Analogue	3,5mm jack
Output Control	RS232
Remote Control	LAN with SNMP; RS-232C (9-pin D-sub) Input and Output; Remote Control IR
<b>OPTION SLOT</b>	
Slot Technology	STv2 (compatible with Intel / NEC OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4
<b>ELECTRICAL</b>	
Power Consumption on Mode [W]	160 (typ.); 305 (max.)
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS
<b>ENVIRONMENTAL CONDITIONS</b>	
Operating Temperature [°C]	+5 to +35
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to +60
<b>MECHANICAL</b>	
Dimensions (W x H x D) [mm]	Without stand: 1,254.5 x 725.3 x 51.1
Weight [kg]	Without stand: 30.5
Bezel Width [mm]	20.5 (left and right); 20.5 (top and bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
<b>AVAILABLE OPTIONS</b>	
Option Slot	HDSdI 1.5 and 3G; Intel Atom, Celeron and Core CPUs
Accessories	Feet (ST-5220); Speaker (SP-RM1); Wall mount (PDW 32-70 L & P); Wall mount (PDW S 32-55 L & P); Wall mount (PDWXS 46 55 L)
<b>ADDITIONAL FEATURES</b>	
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	CE; TÜV GS; C-tick; Energy Star 5.1; FCC Class A; UL/C-UL or CSA; PSB; VCCI; RoHS
Plug and Play	VESA DDC2Bi
Audio	Integrated Speakers (5 W + 5 W); Optional Speakers (15 W + 15 W); Optional speakers NEC SP-RM1 (2x15W)
Shipping Content	Display; Power Cable; slot cover for STv2; VGA cable; Free LAN control software (download); Remote Control (IR)
Warranty	3 years warranty incl. backlight